



JST12F-600SW 12A TRIAC

Rev.A.1.0

The JST12F-600SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST12F-600SW snubberless triac is especially recommended for use on inductive loads. It can be driven directly through the MCU I/O port. By using an external plastic package, JST12F-600SW provides a rated insulation voltage of 2000 VRMS, complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant.

Parameter	Symbol	Value	Unit
Storage junction temperature range	T _{stg}	-40-150	
Operating junction temperature range	T _j	-40-125	
Repetitive peak off-state voltage (T _j =25 °C)	V _{DRM}	600	V

Average gate power dissipation ($T_j=125^\circ C$)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage ($T_j=25^\circ C$; non-repetitive, off-state; FIG.7)	V_{PP}	4	kV

($T_j=25^\circ C$ unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	$V_D=12V R_L=33\Omega$	- -	MAX.	10	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	$V_D=V_{DRM} T_j=125^\circ C$ $R_L=3.3K\Omega$	- -	MIN.	0.2	V
I_L	$I_G=1.2I_{GT}$	-	MAX.	25	mA
				30	
I_H	$I_T=500mA$		MAX.	15	mA
dV/dt	$V_D=400V$ Gate Open $T_j=125^\circ C$		MIN.	500	V/ μ s
$(dI/dt)c$	$(dV/dt)c=10V/\mu s$ $T_j=125^\circ C$		MIN.	3	A/ms
t_{on}	$I_G=20mA I_A=200mA I_R=20mA$ $T_j=25^\circ C$	TYP.		2.5	μ s
t_{off}				25	

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	$I_{TM}=17A$	$t_p=380\mu s$	$T_j=25^\circ C$	1.5 V
V_{TO}	Threshold voltage		$T_j=125^\circ C$	0.77 V
R_D	Dynamic resistance		$T_j=125^\circ C$	35 m Ω
I_{DRM}	$V_D=V_{DRM}$ $V_R=V_{RRM}$	$T_j=25^\circ C$		5 μ A
I_{RRM}		$T_j=125^\circ C$		0.4 mA

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	2.4	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

<u>J</u>	<u>ST</u>	<u>12</u>	<u>F</u>	<u>-600</u>	<u>SW</u>
JieJie Microelectronics Co., Ltd.					
	Triacs				
		IT(RMS):12A			
			F:TO-220F(Ins)		
				600:V _{DRM} /V _{RRM} 600V	
					SW:IGT1-3 10mA

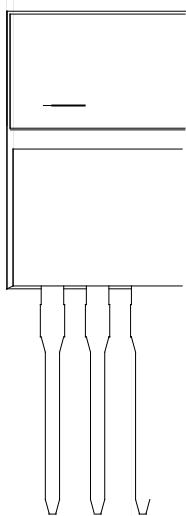


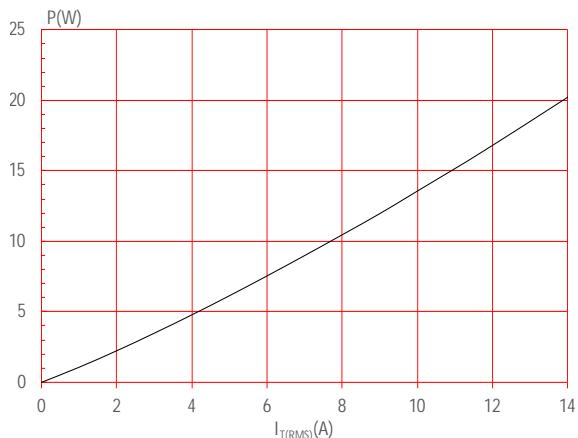
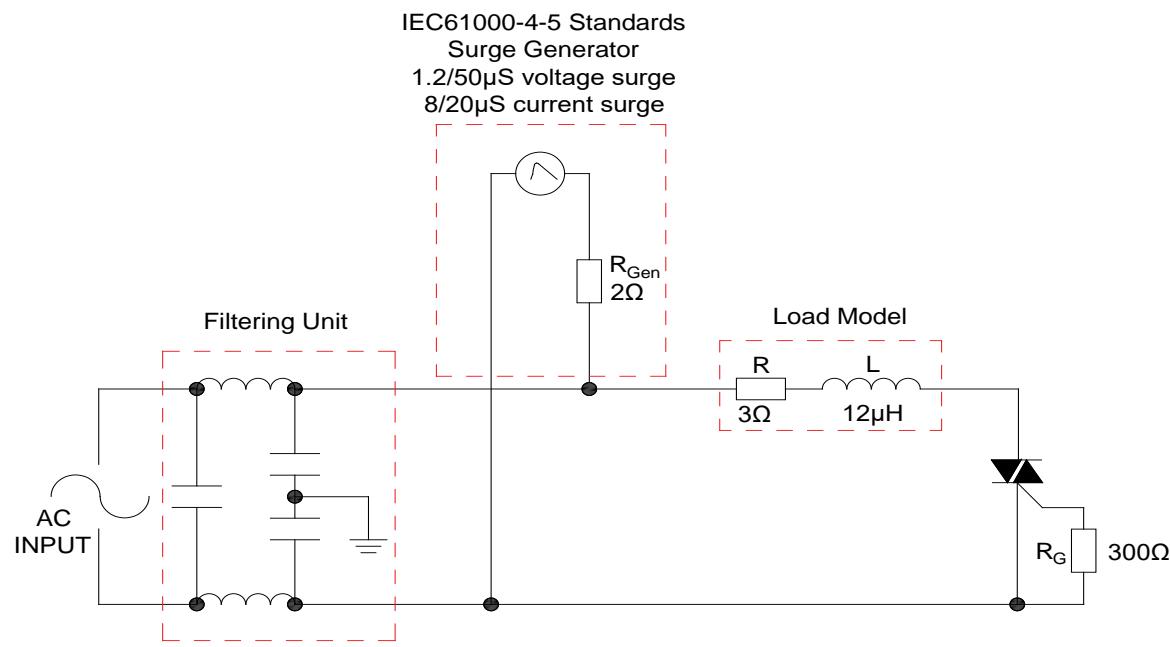
FIG.1 Maximum power dissipation versus RMS on-state current**FIG.2:** RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



Refer to Instructions for installation of plastic-sealed in-line power devices released by JieJie

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST12F-600SW	600	10	TO-220F(Ins)	50	Tube

Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated

JST12F-600SW

Jie

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may 0 Tc 0 Tw 2.55 -0.0014 (u3J 0 Tch i)69 (-)6 (s)4..35([(r)7 (es)14ul(i)6 (h)]TJ (