




With high ability to withstand the shock loading of large current, JCT620A SCR provides high dV/dt rate with strong resistance to electromagnetic interference. It is especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc. From all three terminals to external heatsink, JCT620A provides a rated insulation voltage of 2500 V_{RMS}, complying with UL standards (File ref: E252906). Package TO-220A is RoHS compliant.

Symbol	Value	Unit
I _{T(RMS)}	20	A
V _{DRM/V_{RRM}}	600	V
I _{GT}	15	mA

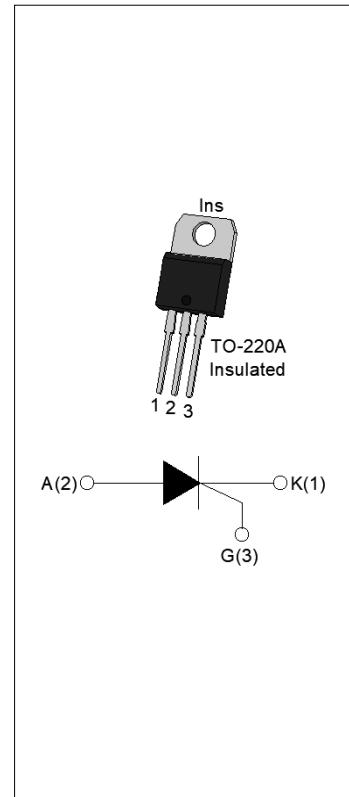

Parameter	Symbol	Value	Unit
Storage junction temperature range	T _{stg}	-40-150	
Operating junction temperature range	T _j	-40-125	
Repetitive peak off-state voltage (T _j =25 °C)	V _{DRM}	600	V
Repetitive peak reverse voltage (T _j =25 °C)	V _{RRM}	600	V
Average on-state current (T _c = 69 °C)	I _{T(AV)}	13	A
RMS on-state current (T _c = 69 °C)	I _{T(RMS)}	20	A
Non repetitive surge peak on-state current (t _p =10ms, T _j =25 °C)	I _{TSM}	250	A
Non repetitive surge peak on-state current (t _p =8.3ms, T _j =25 °C)		275	
I ² t value for fusing (t _p =10ms, T _j =25 °C)	I ² t	312.5	A ² s
Critical rate of rise of on-state current (I _G =2 I _{GT} , f=100Hz, T _j =125 °C)	dI/dt	150	A/s

Peak gate current ($t_p=20\text{ s}$, $T_j=125^\circ\text{C}$)	I_{GM}	5	A
Average gate power dissipation ($T_j=125^\circ\text{C}$)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	20	W
Peak pulse voltage ($T_j=25^\circ\text{C}$; non-repetitive, off-state; FIG.7)	V_{pp}	0.5	kV

($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	
I_{GT}	$V_D=12\text{V}$ $R_L=33\Omega$	-	-	15	mA
V_{GT}		-	-	1	V
V_{GD}	$V_D=V_{DRM}$ $T_j=125^\circ\text{C}$ $R_L=3.3\text{K}\Omega$	0.2	-	-	V
I_L	$I_G=1.2I_{GT}$	-	-	60	mA
I_H	$I_T=500\text{mA}$	-	-	50	mA
dV/dt	$V_D=400\text{V}$ Gate Open $T_j=125^\circ\text{C}$	500	-	-	V/s
t_{on}	$I_G=40\text{mA}$ $I_A=400\text{mA}$ $I_R=40\text{mA}$ $T_j=25^\circ\text{C}$	-	5	-	s
t_{off}		-	70	-	

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	$I_{TM}=40\text{A}$	$t_p=380\text{ s}$	$T_j=25^\circ\text{C}$	1.55
V_{TO}	Threshold voltage		$T_j=125^\circ\text{C}$	0.74
R_D	Dynamic resistance		$T_j=125^\circ\text{C}$	20
I_{DRM}	$V_D=V_{DRM}$	$T_j=25^\circ\text{C}$		5
I_{RRM}		$T_j=125^\circ\text{C}$		0.3

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case(DC)	2.1	/W
$R_{th(j-a)}$	junction to ambient (DC)	60	/W

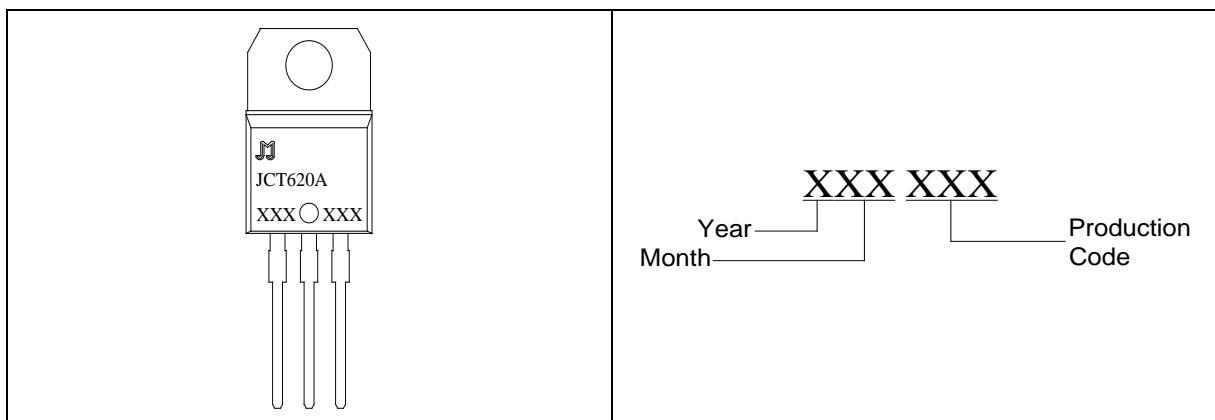
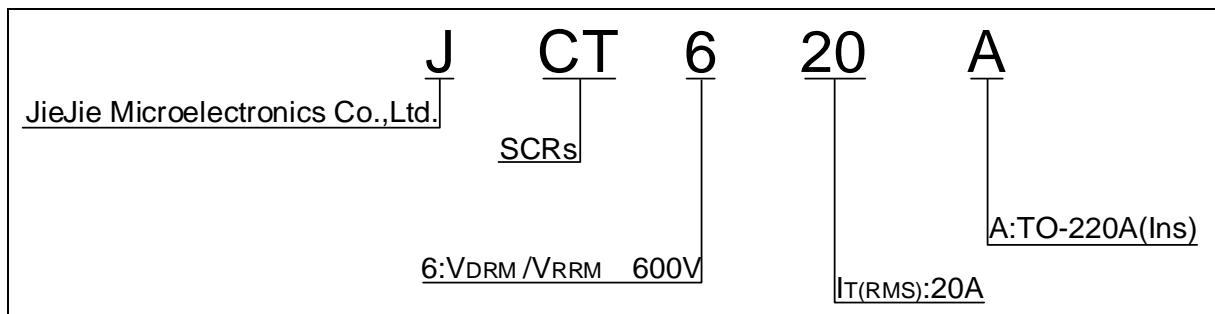


FIG.1 Maximum power dissipation versus RMS on-state current

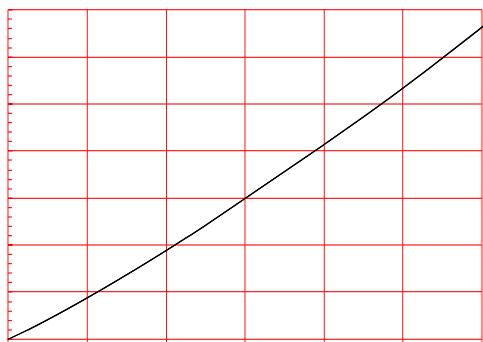


FIG.2: RMS on-state current versus case temperature

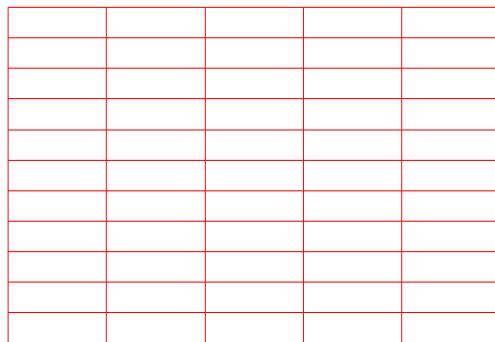


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.



Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
JCT620A	600	15	TO-220A(Ins)	50	Tube

Document Revision History

Date	Revision	Changes
Apr.13, 2023	A.1.0	Last update

JCT620A

 **JieJie Microelectronics CO. , Ltd.**

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics

of3