

NOTE 1: 1K resistor between Gate and Cathode, the

ELECTRICAL CHARACTERISTICS ($T_j=25$)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	

STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX.)	Unit

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit

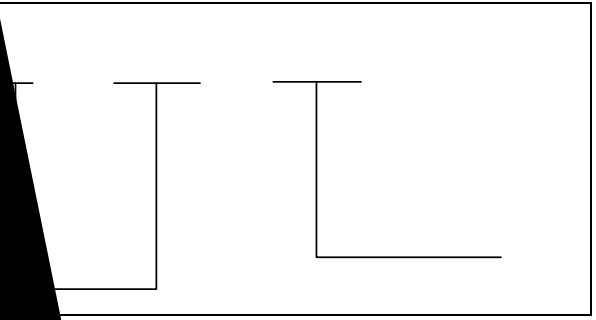




FIG.1

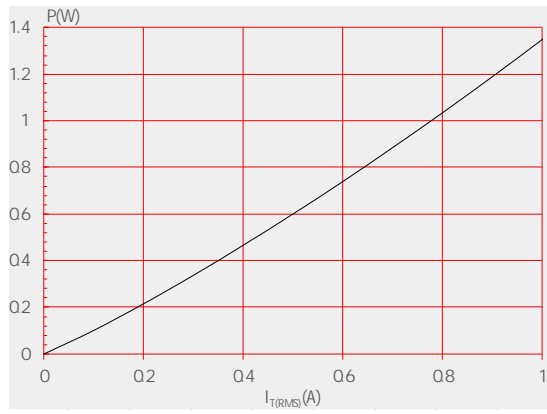


FIG.2:

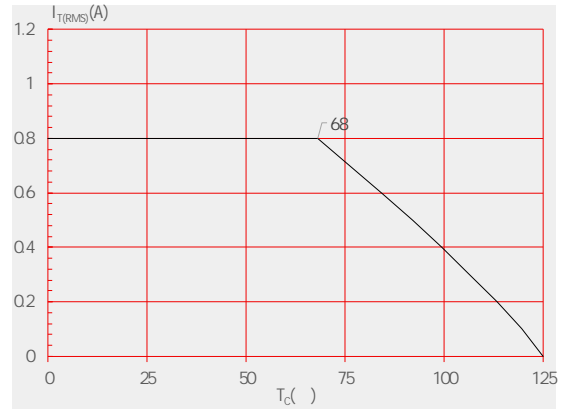


FIG.3:

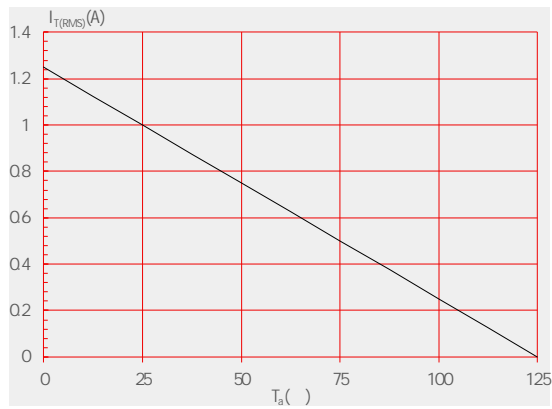


FIG.4:

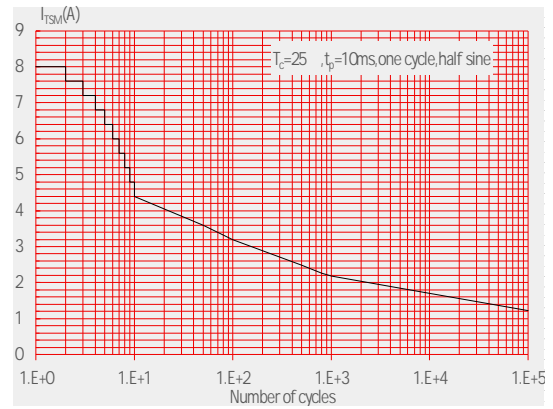


FIG.5:



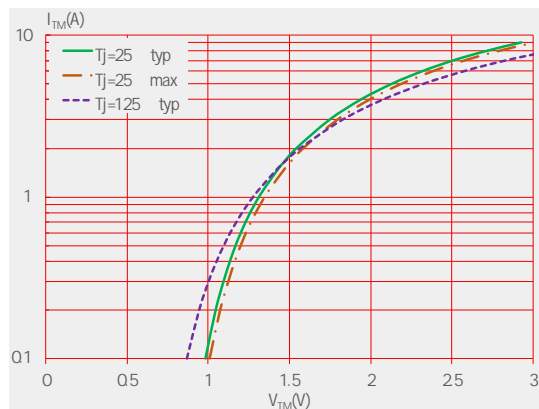


FIG.6:




FIG.7:

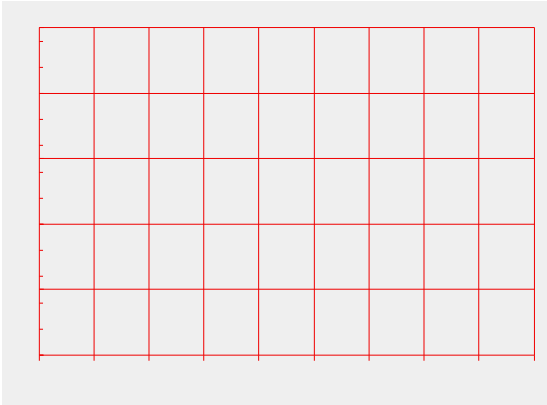

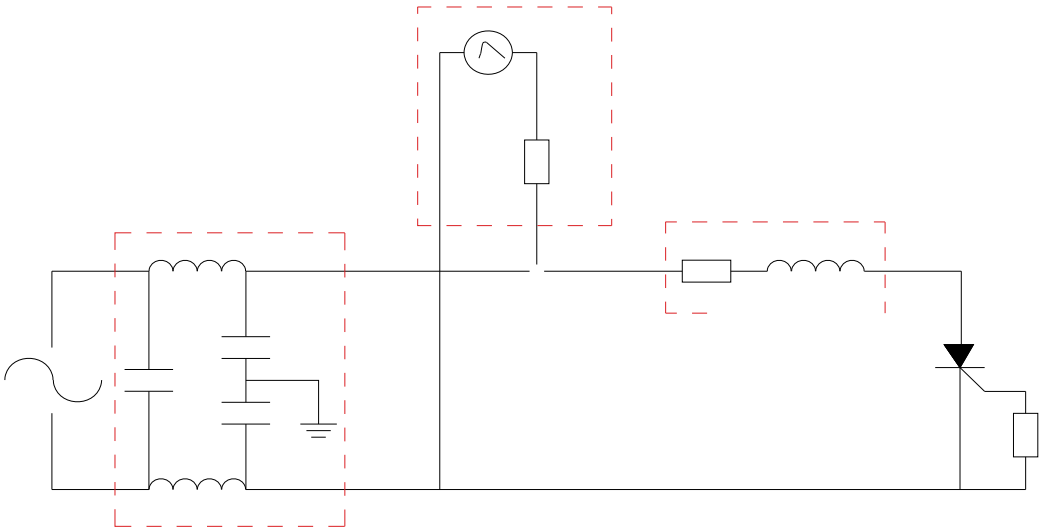

JX008N2

PACKAGE MECHANICAL DATA



Ref.

