




T0635H-6C 6A TRIAC

Rev.A.1.0

DESCRIPTION:

MAIN FEATURES



MAXIMUM RATINGS


| Parameter | Symbol | Value | Unit |
|-----------|--------|-------|------|
| | | | |
| | | | |
| | | | |
| 0 | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

ELECTRICAL CHARACTERISTICS

Symbol Test Condition Quadran / i r k

ORDERING INFORMATION

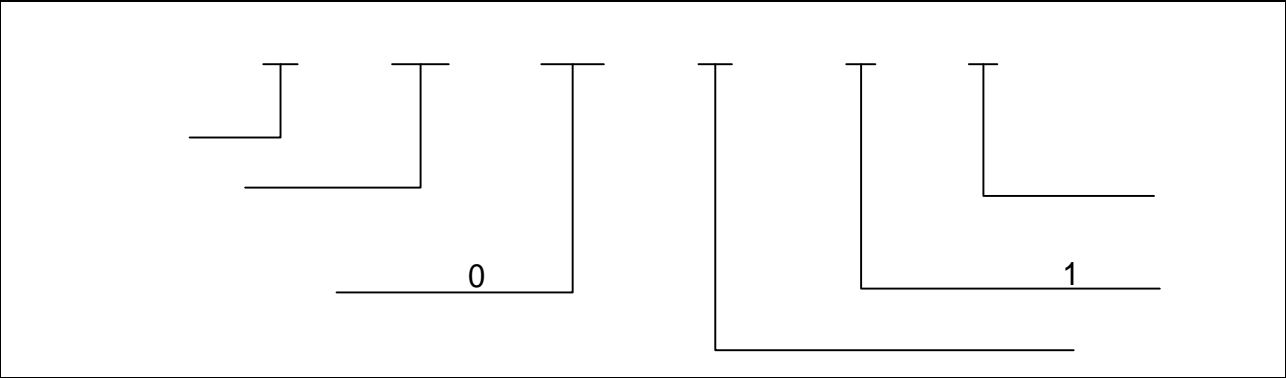

MARKING

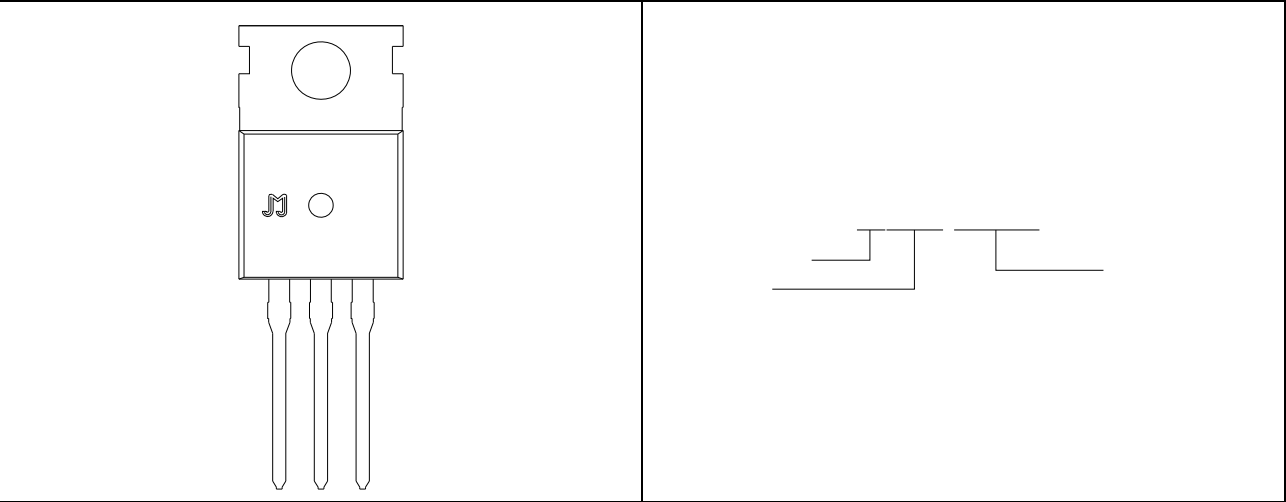


FIG.1

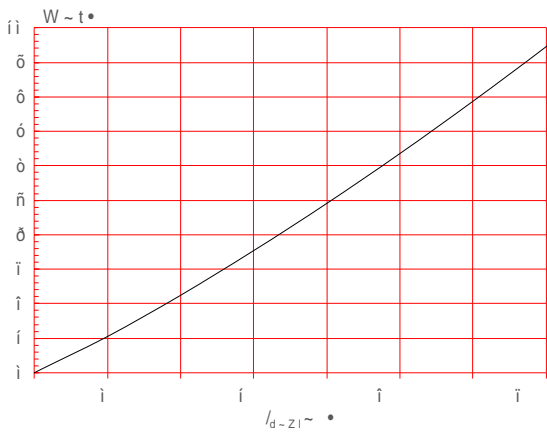


FIG.3:

FIG.2:


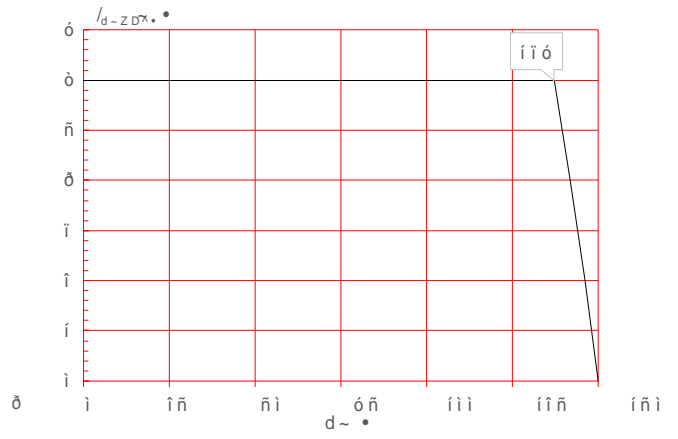


FIG.4:

Ö

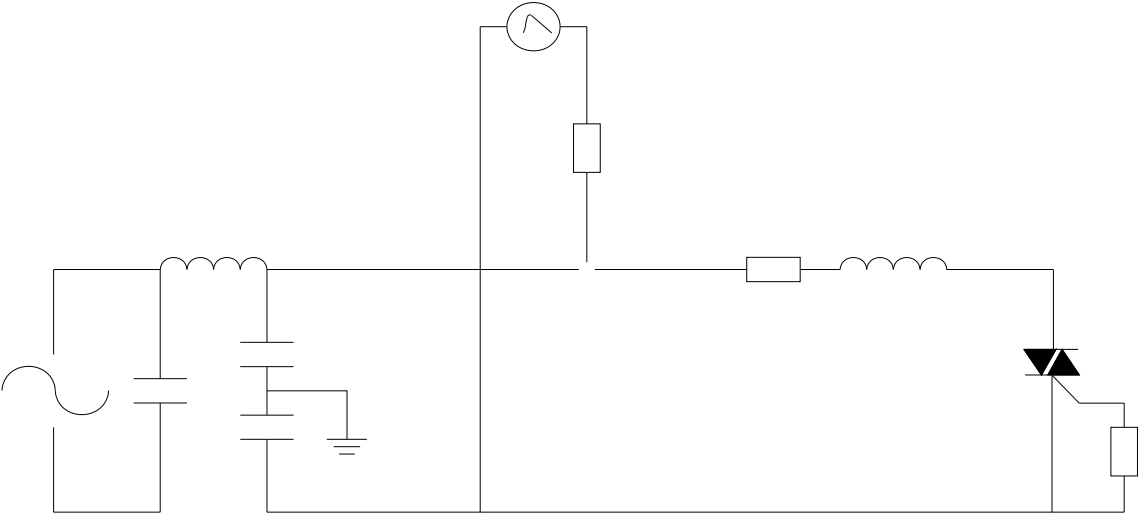

ORDERING INFORMATION

| Order code | Voltage V _{DRM} /V _{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|------------|---|---------|---------|--------------------|------------------|
| | | - - | | | |
| T0635H-6C | 600 | 35 | TO-220C | 50 | Tube |

Document Revision History

PACKAGE MECHANICAL DATA

