


ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value	Unit

STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX.)	Unit

ORDERING INFORMATION

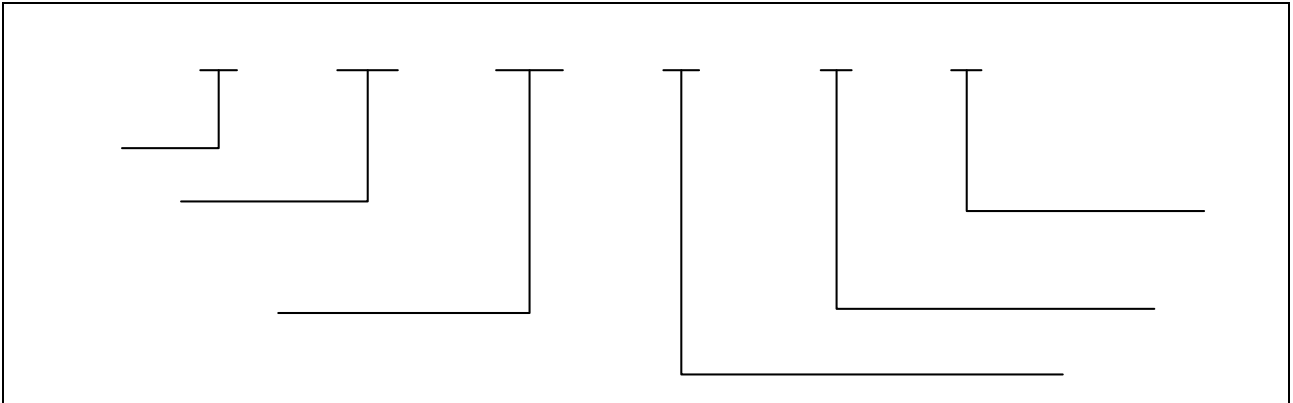

MARKING

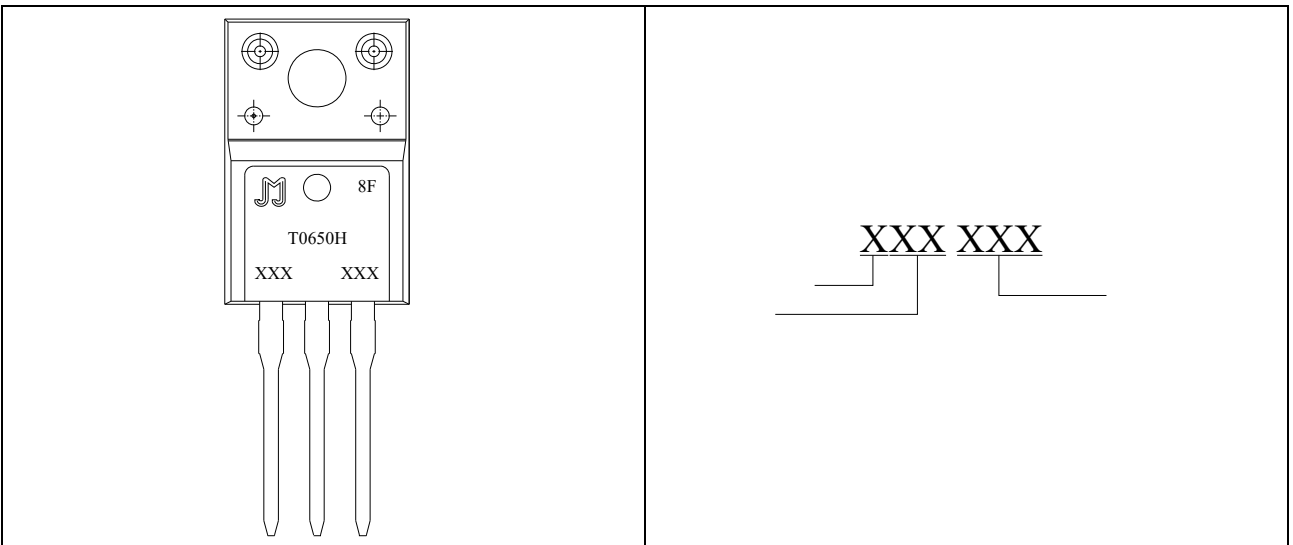


FIG.1

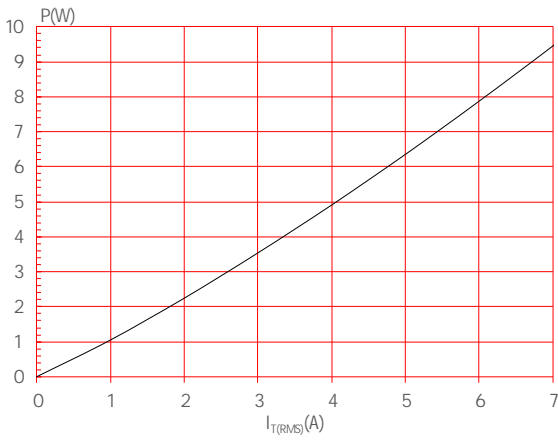


FIG.2:

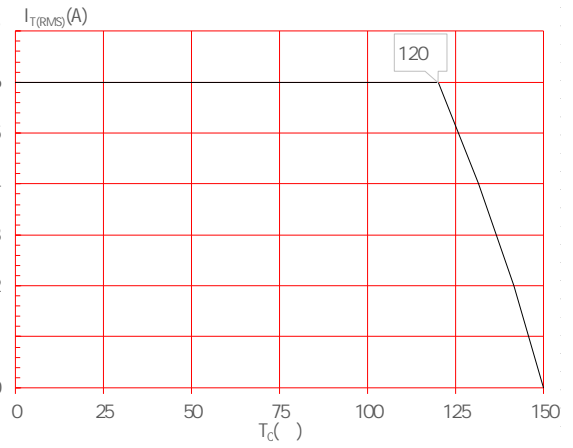


FIG.3:

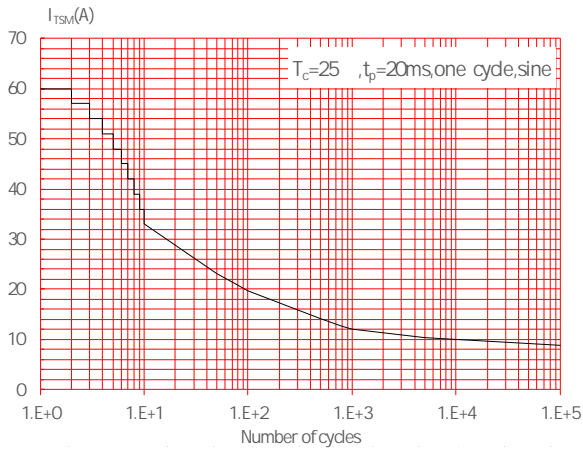


FIG.4:

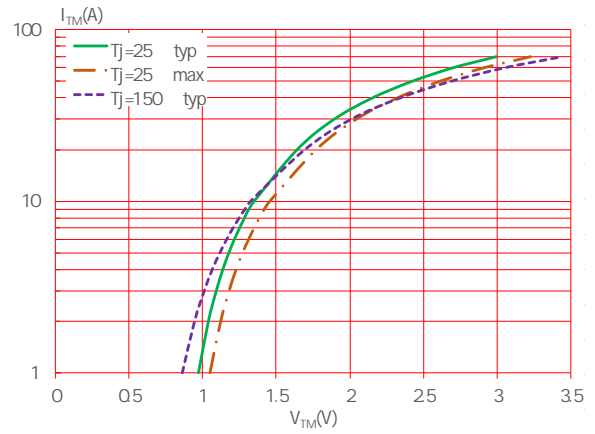


FIG.5:



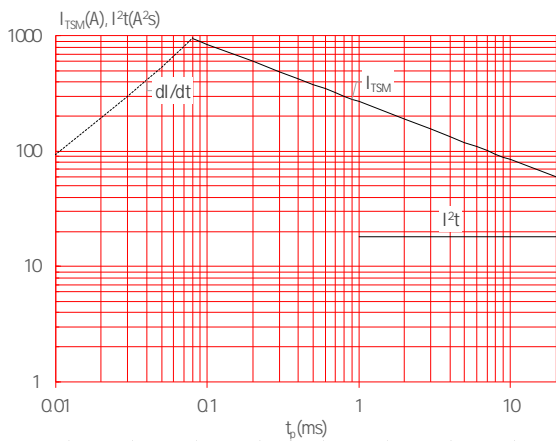


FIG.6:

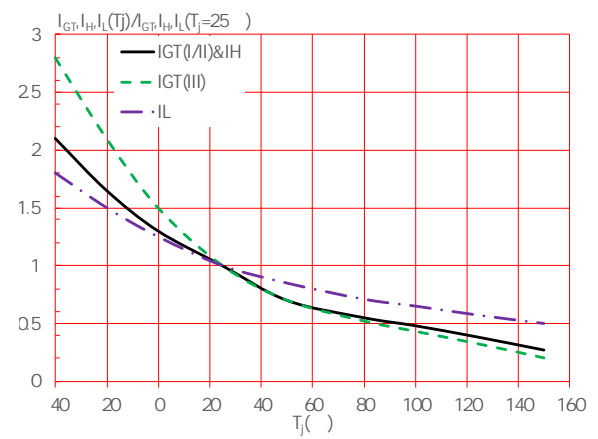

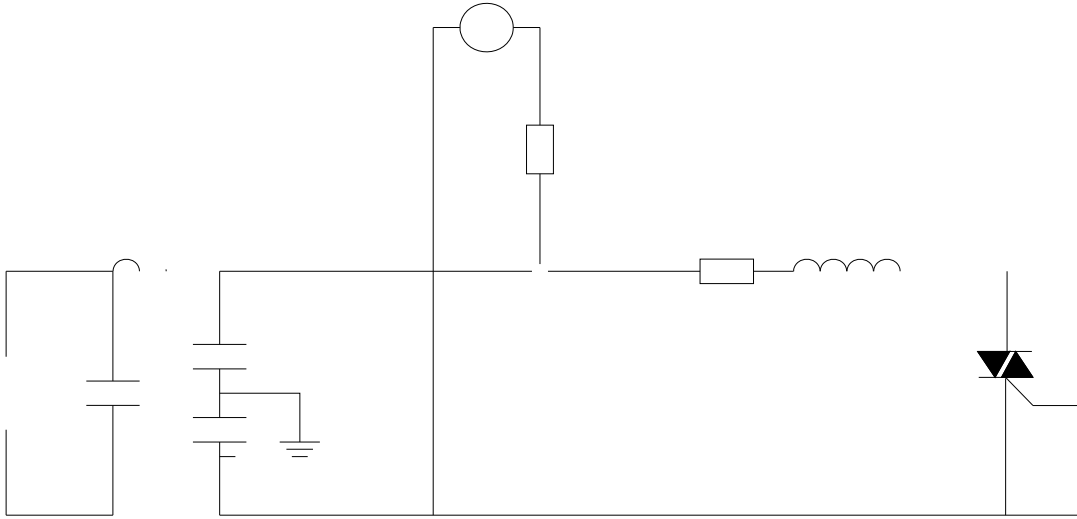

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T0650H-8F	800	50	TO-220F(Ins)	50	Tube

Document Revision History

PACKAGE MECHANICAL DATA

