

	°C			
	°C			

ELECTRICAL CHARACTERISTICS °C

Symbol	Test Condition	Quadrant	Value	Unit
		I II III		
		I II III		
	°C	I II III		
		I III		
		II		
	°C			
	°C			
	°C			
	°C			


STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX.)	Unit
		°C	
		°C	
		°C	
		°C	
		°C	

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
			°C
			°C

ORDERING INFORMATION

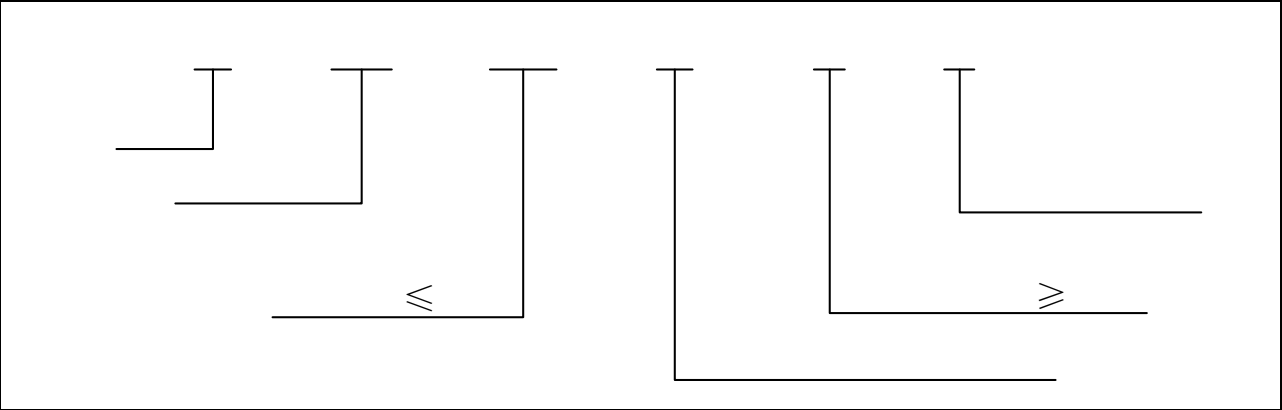

MARKING

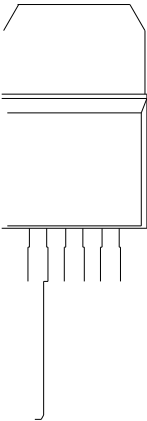


FIG.1

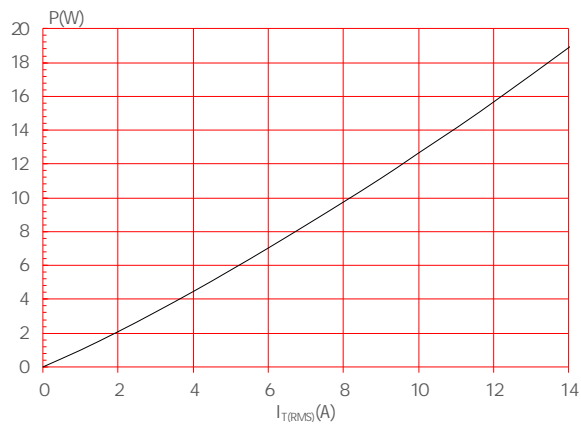


FIG.2:

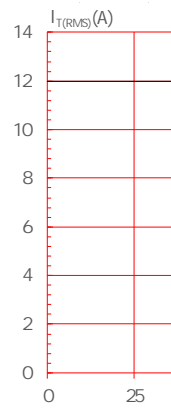


FIG.3:



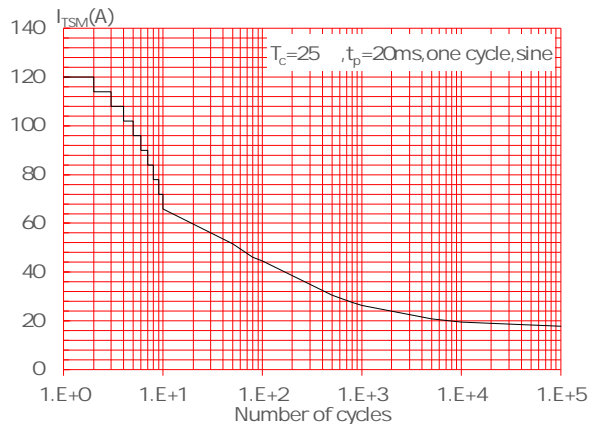


FIG.4:

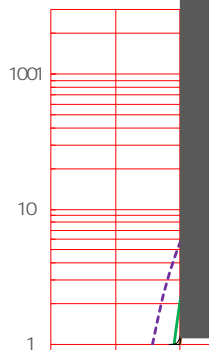

:

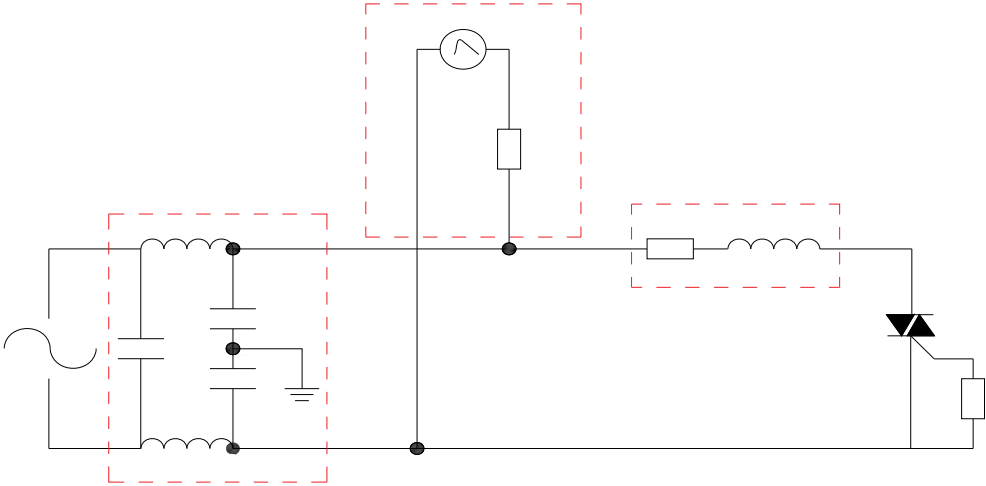

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T1250H-8A	800	50	TO-220A(Ins)	50	Tube

Document Revision History

