




THE MITSUBISHI ELECTRIC CORPORATION, Ltd.

T2535H-6

25A 1:1 A

Rev.A.1.0

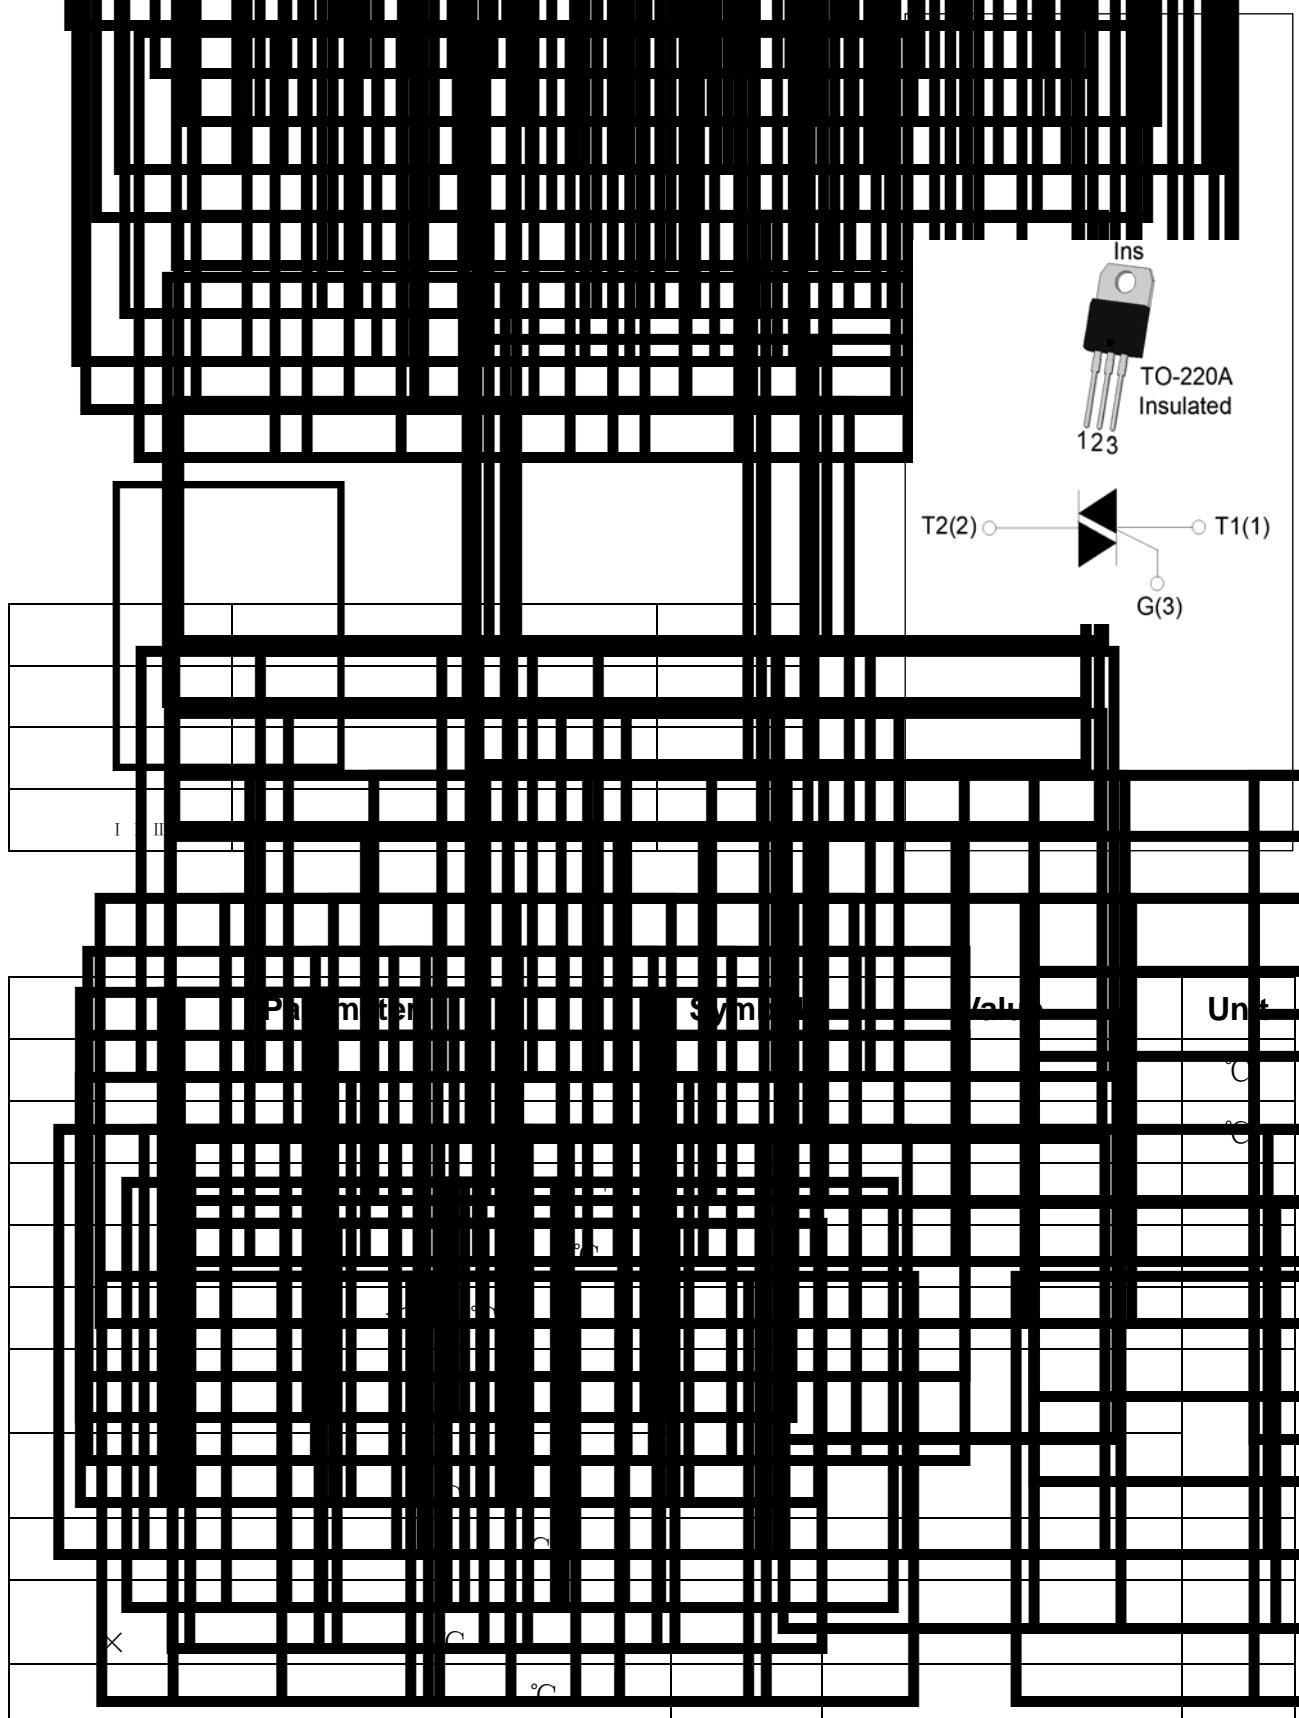



°C



°C

Symbol	Test Condition	Quadrant	Value	Unit
		I		
		II		
		III		
		IV		
	0°C	I		
	25°C	II		
	0°C	III		
	-55°C	IV		
	150°C	I		
	125°C	II		
	100°C	III		
	85°C	IV		
	0°C	I		
	-55°C	II		
	-55°C	III		
	150°C	IV		

Symbol	Parameter	Value(MAX.)	Unit

Symbol	Parameter	Value	Unit
			°C
			°C

T2535H-6A

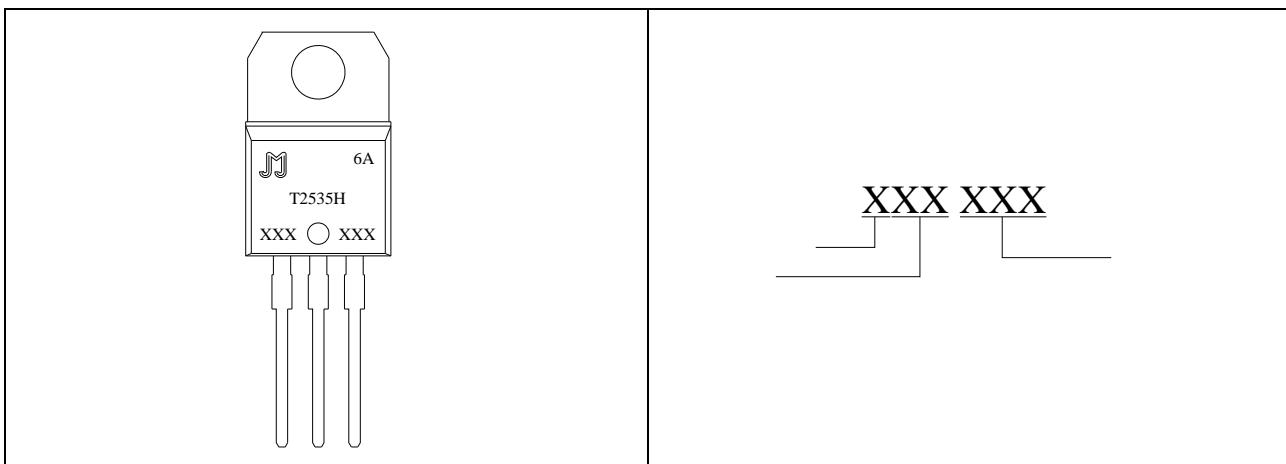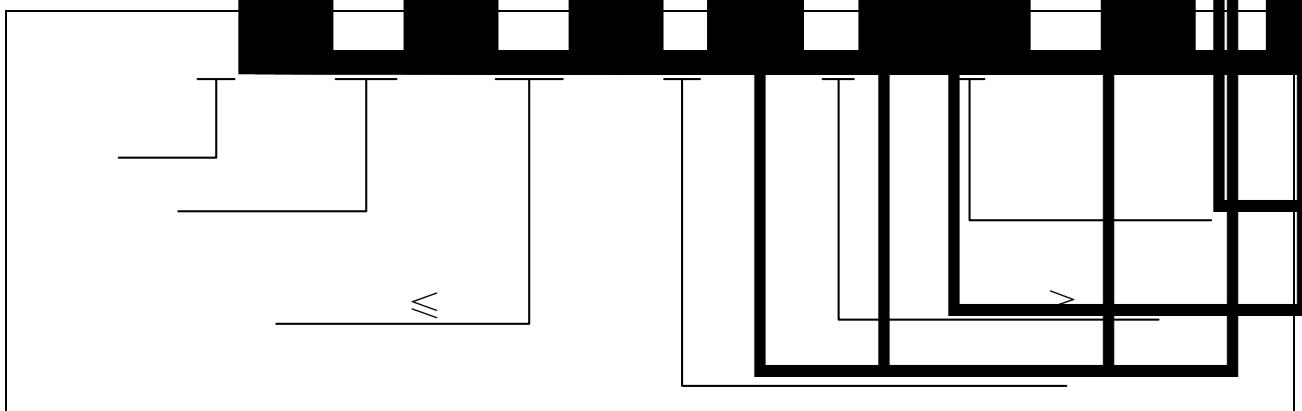

T2535H-6A

JieJie Microelectronics CO., Ltd.

FIG.2:

FIG.1



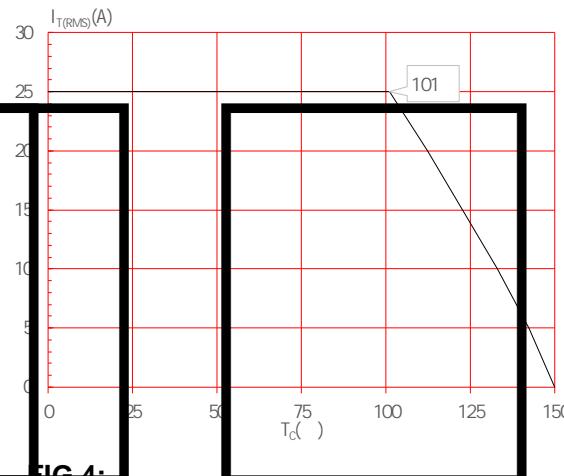



FIG.3:

FIG.4:

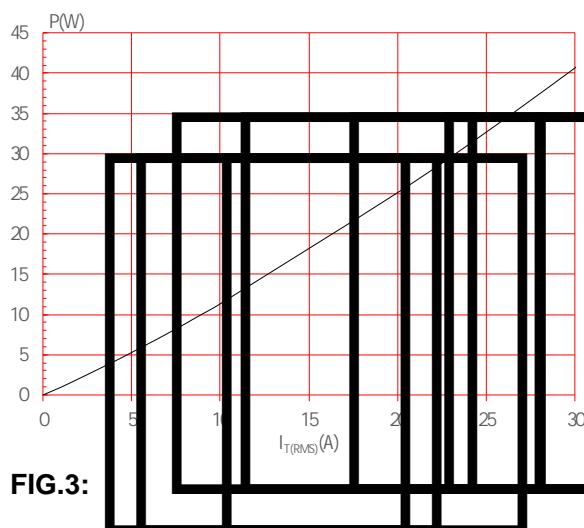
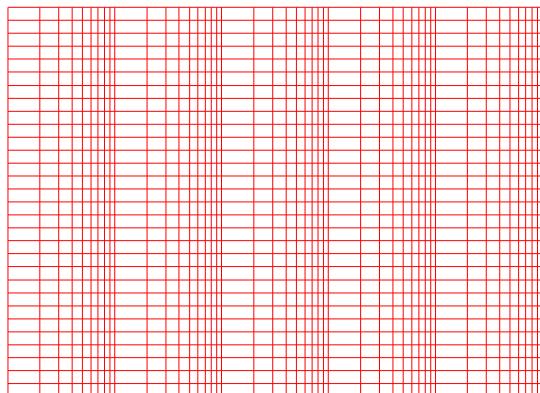


T2535H-6A



JieJie Microelectronics CO., Ltd.

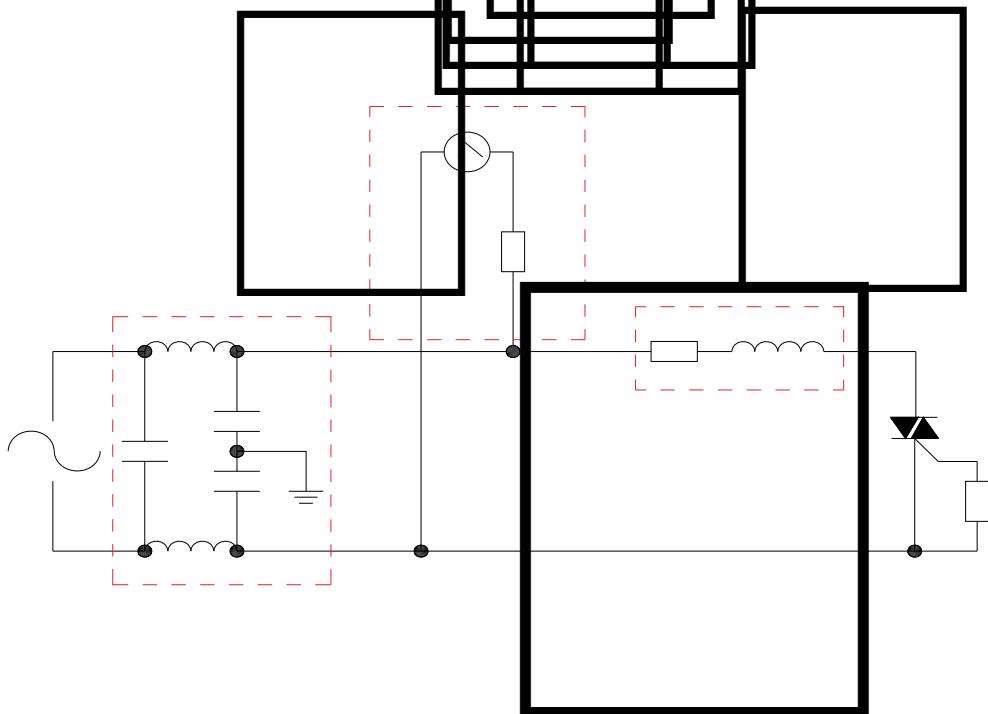

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
T2535H-6A	600	35	TO-220A(Ins)	50	Tube

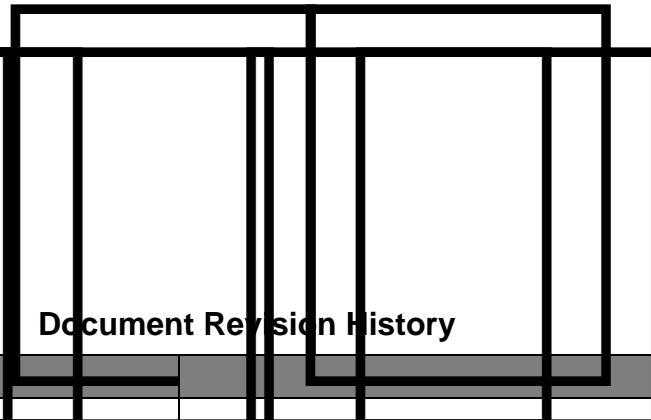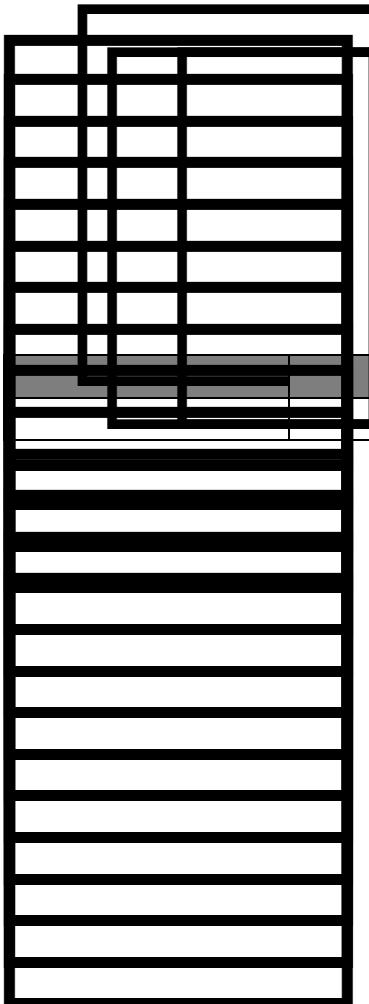

Document Revision History



2535H-6A

