



T2550H-8C 25A TRIAC

Rev.A.1.0

DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit

--	--	--	--

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value	Unit


STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX.)	Unit

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit

ORDERING INFORMATION

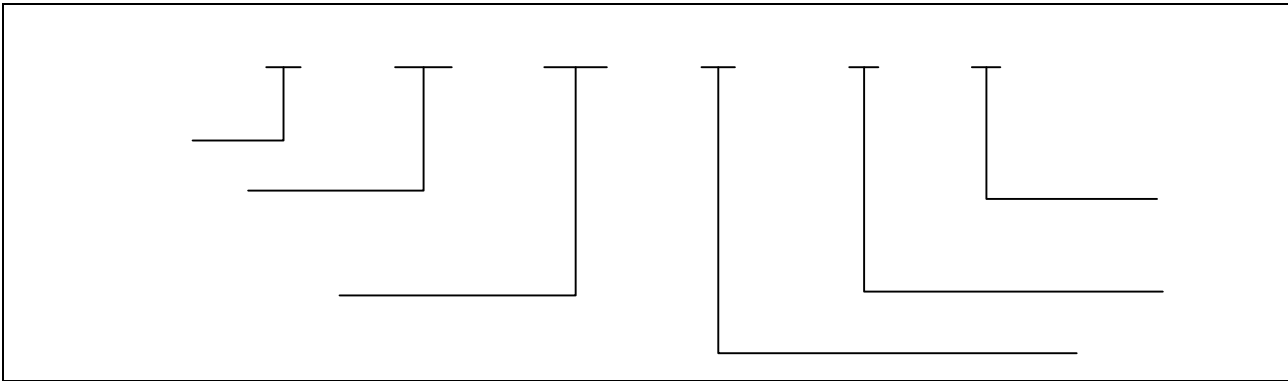

MARKING

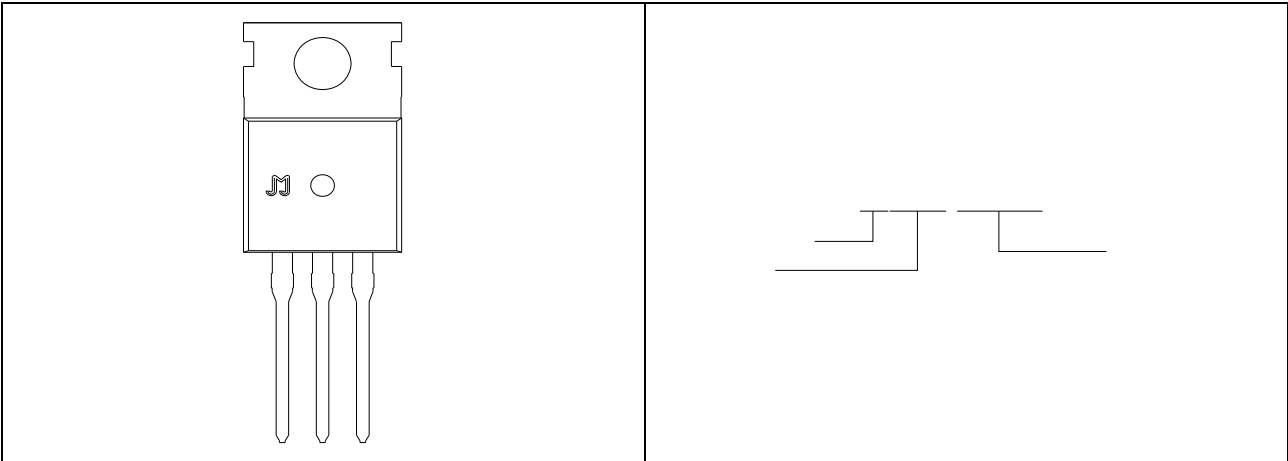


FIG.1

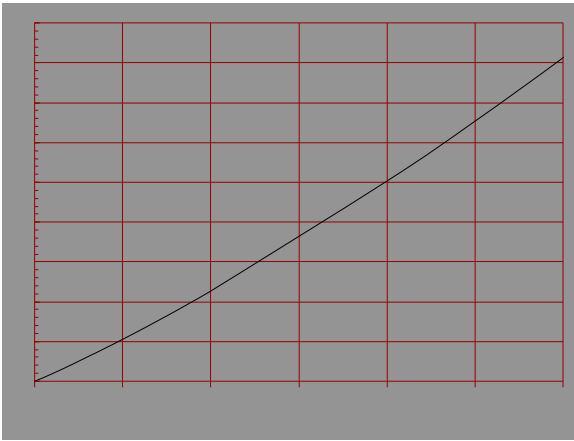


FIG.2:

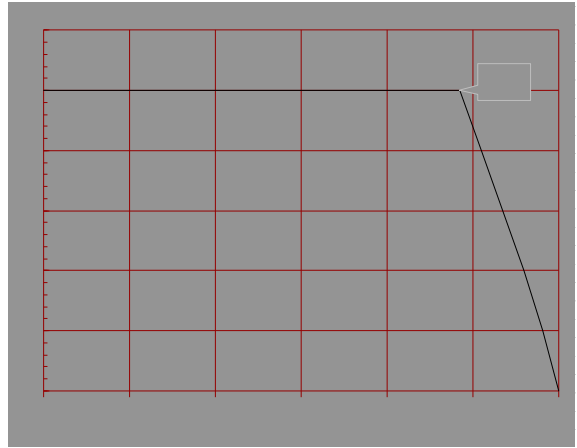


FIG.3:

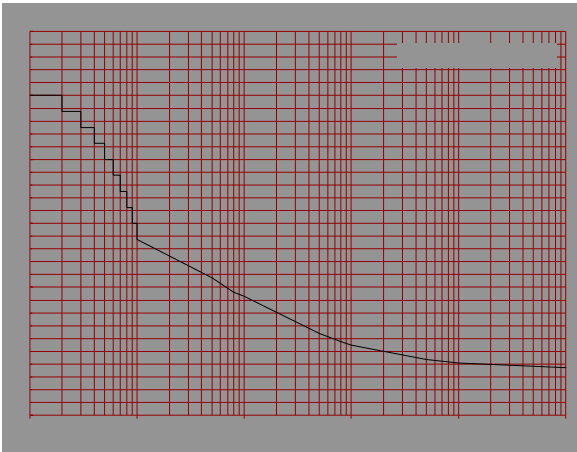


FIG.4:

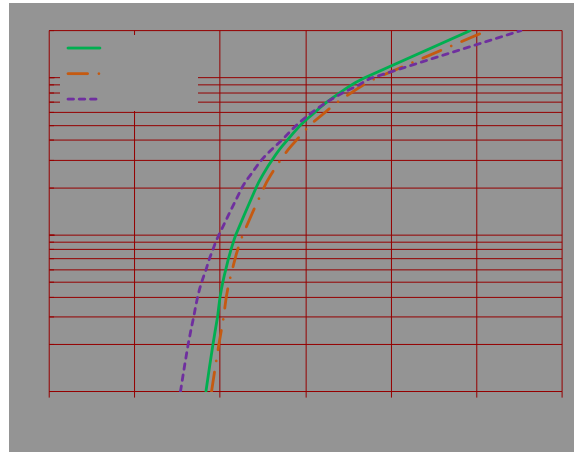


FIG.5:



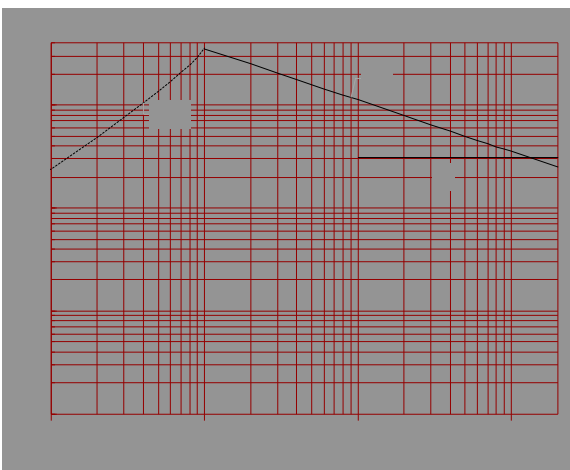


FIG.6:

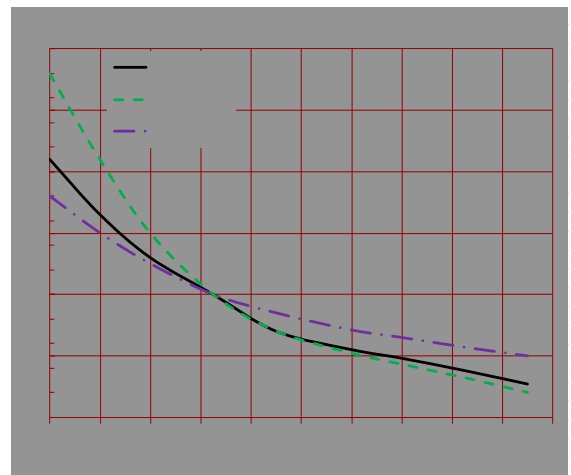

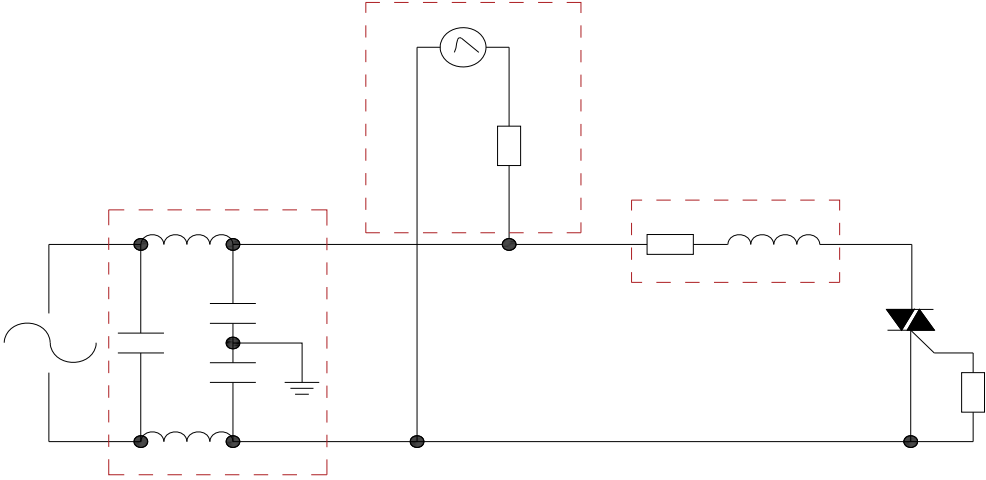

SHAPING AND SOLDERING PARAMETERS

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T2550H-8C	800	50	TO-220C	50	Tube

Document Revision History

Document Revision History		

PACKAGE MECHANICAL DATA

