




DESCRIPTION:

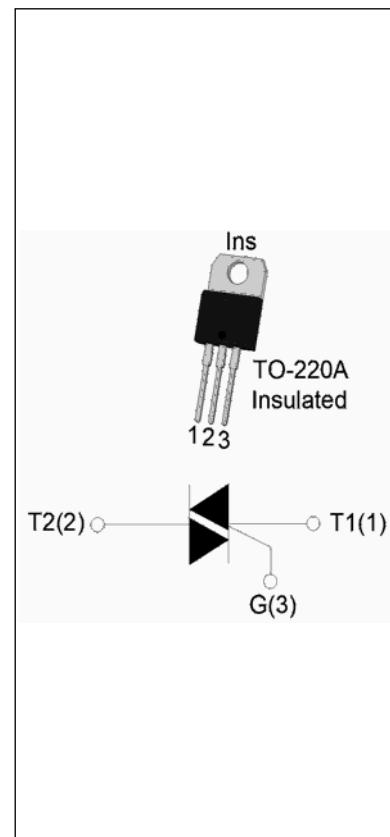

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
x			

T3050H-8A

 **JieJie Microelectronics CO., Ltd.**

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value		Unit

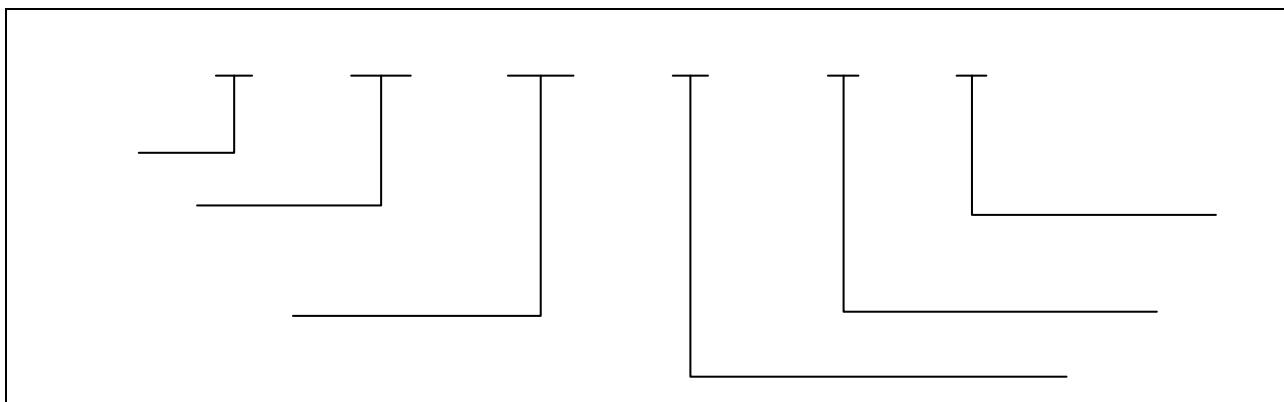
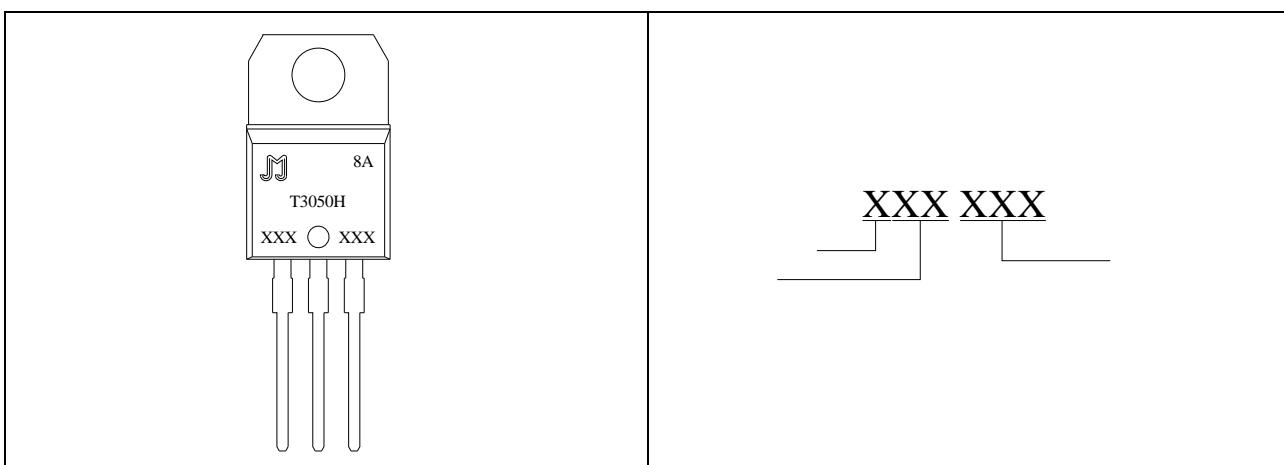
ORDERING INFORMATION**MARKING**

FIG.1:

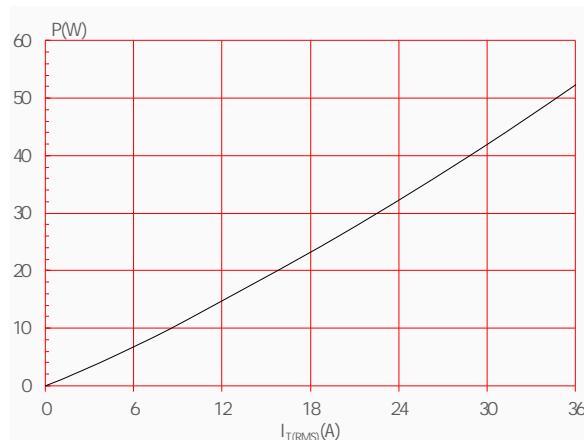


FIG.3:

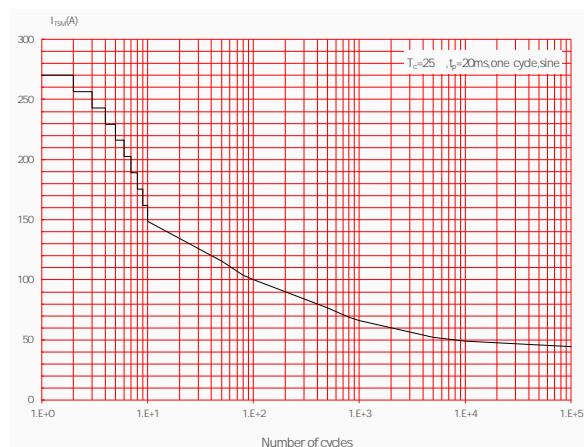


FIG.5:

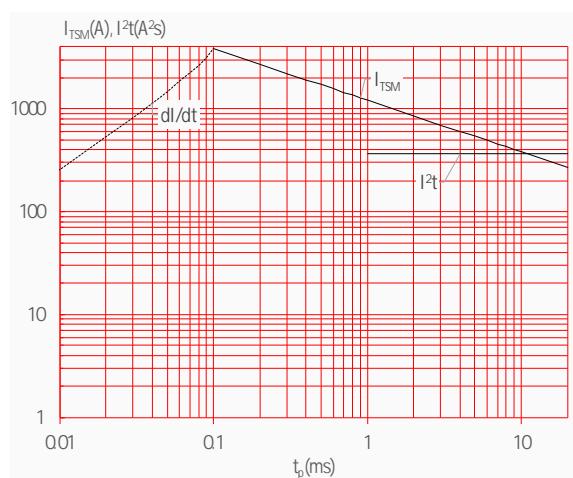


FIG.2:

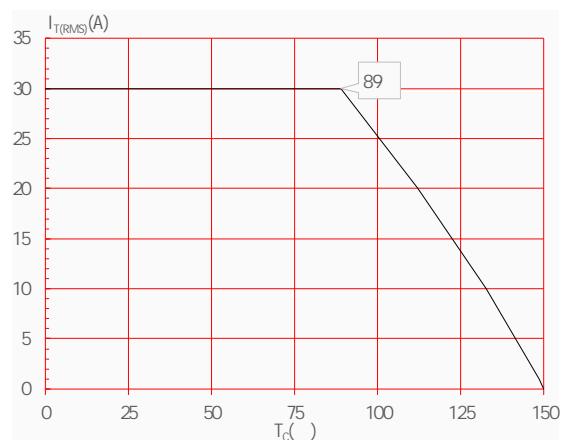


FIG.4:



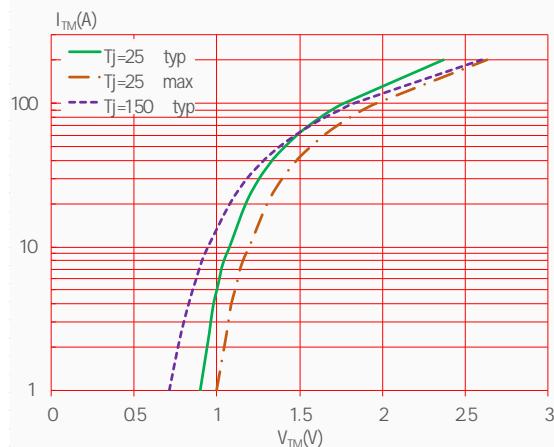


FIG.6:

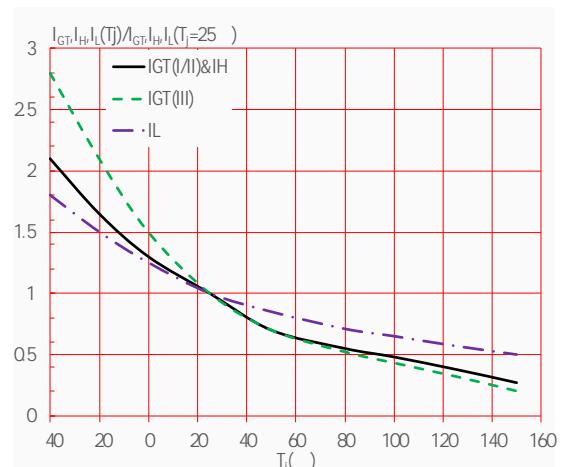

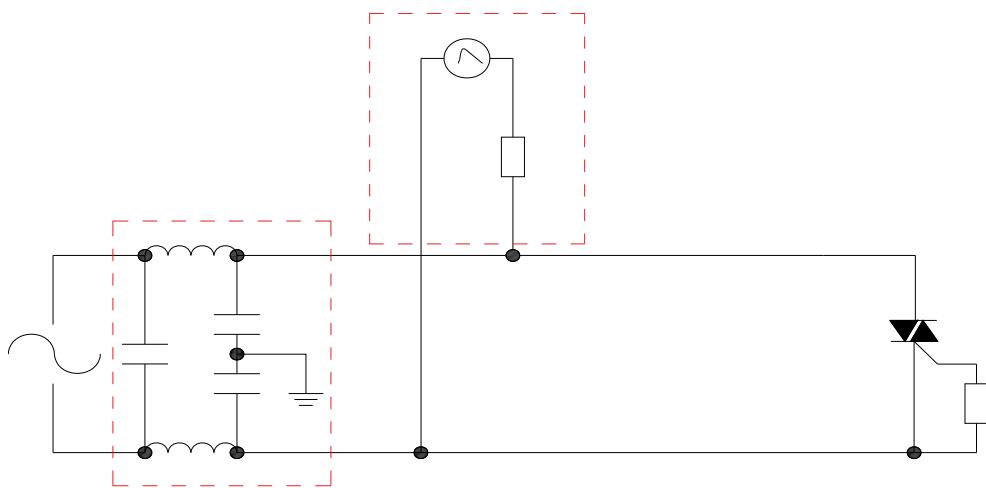

SHAPING AND SOLDERING PARAMETERS

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T3050H-8A	800	50	TO-220A(Ins)	50	Tube

Document Revision History

PACKAGE MECHANICAL DATA

