

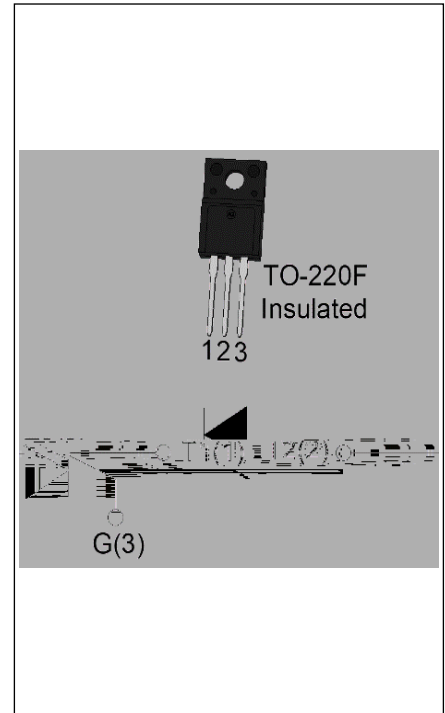


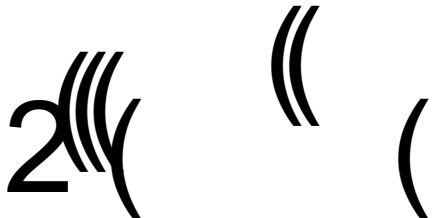









DESCRIPTION: 



MAIN FEATURES

| | | |
|--|--|--|
| | | |
| |  | |
| | | |
| | | |

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Value | Unit |
|-----------|--------|---|------|
| | |  | |
| | |  | |
| | |  | |
| | |  | |
| | |  | |
| | |  | |
| | |  | |
| | |  | |

ORDERING INFORMATION

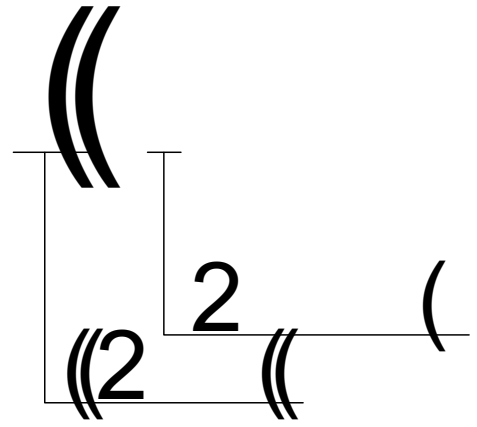
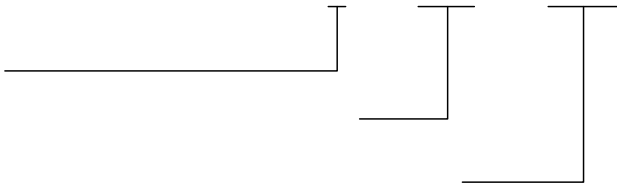


FIG.1

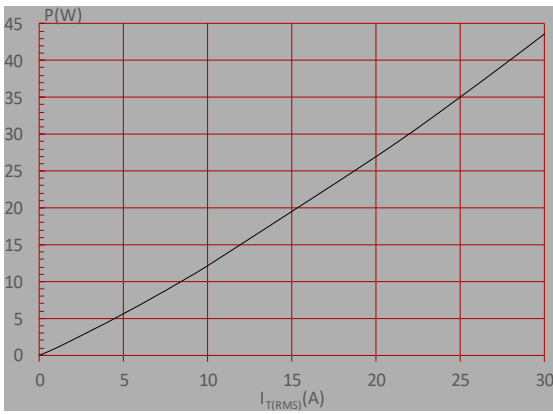


FIG.2:

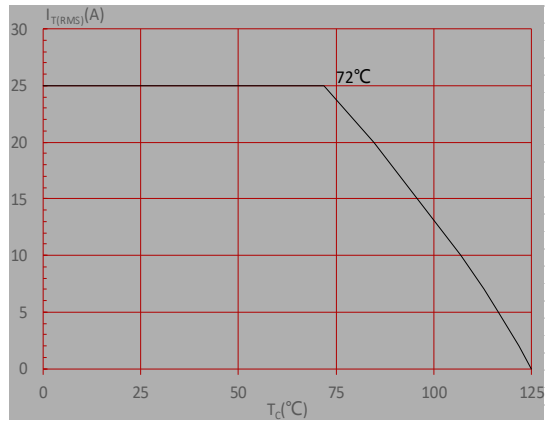


FIG.3:

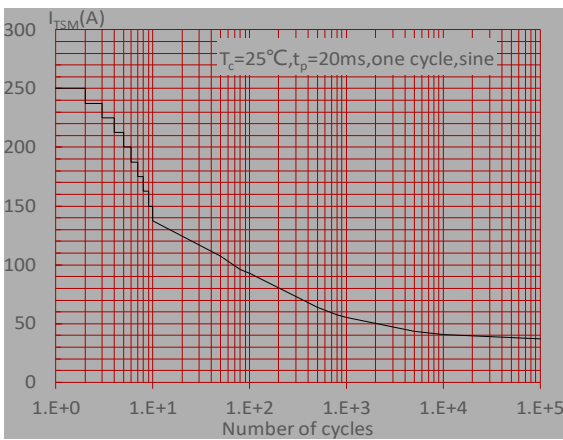


FIG.4:

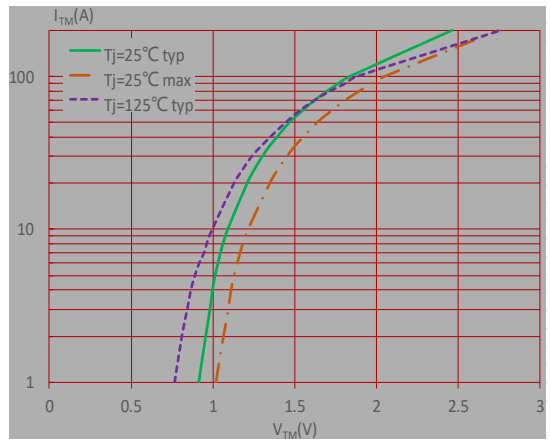


FIG.5:

424 324


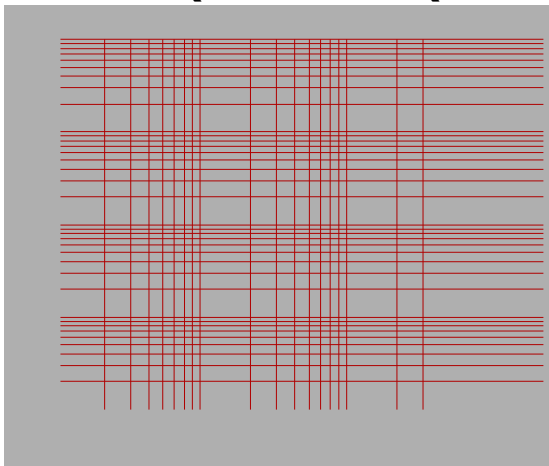


FIG.6:

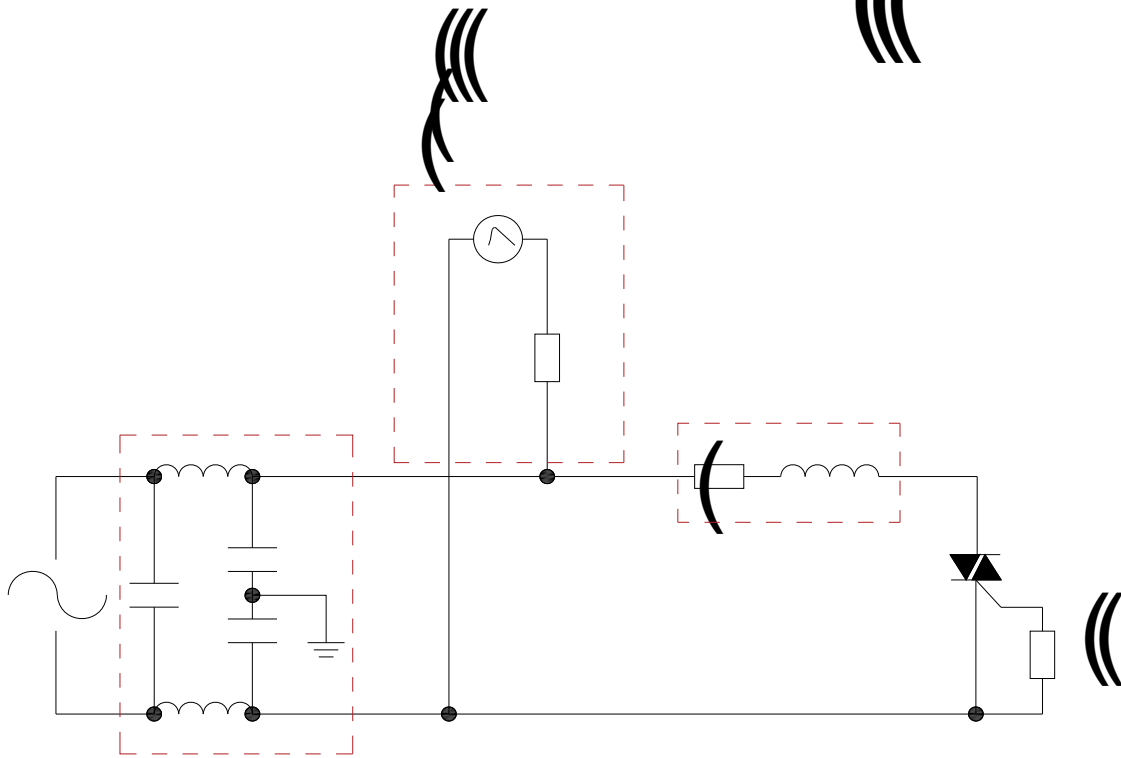

SHAPING AND SOLDERING PARAMETERS

ORDERING INFORMATION

| Order code | Voltage V _{DRM} /V _{RRM} (V) | IGT(mA) | | Package | Base qty. (pcs) | Delivery mode |
|-------------|---|---------|----|--------------|--------------------|---------------|
| | | - | - | | | |
| JST24F-600C | 600 | 25 | 50 | TO-220F(Ins) | 50 | Tube |

Document Revision History

| Rev | Rev. Description | Rev. Date |
|-----|------------------|-----------|
| | | |

