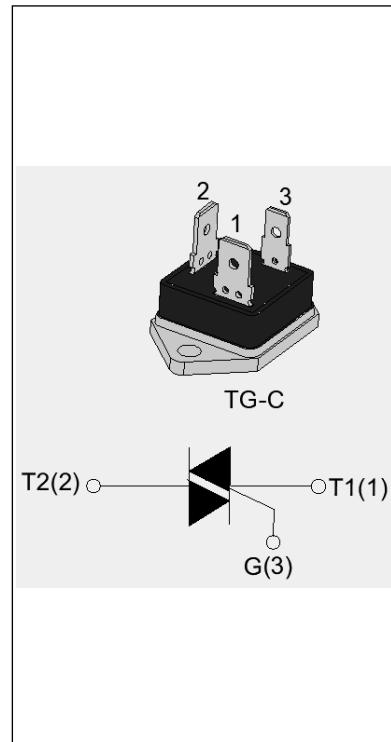




DESCRIPTION:



MAIN FEATURES

| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Value | Unit |
|-----------|--------|-------|------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| x | | | |
| | | | |
| | | | |
| | | | |

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

| Symbol | Parameter | Value(MAX.) | Unit |
|--------|-----------|-------------|------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

THERMAL RESISTANCES

| Symbol | Parameter | Value | Unit |
|--------|-----------|-------|------|
| | | | |
| | | | |

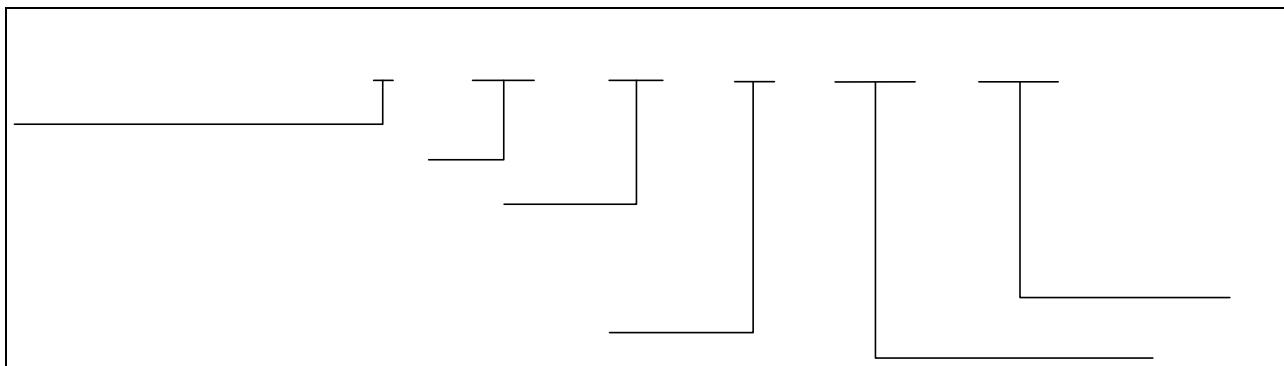
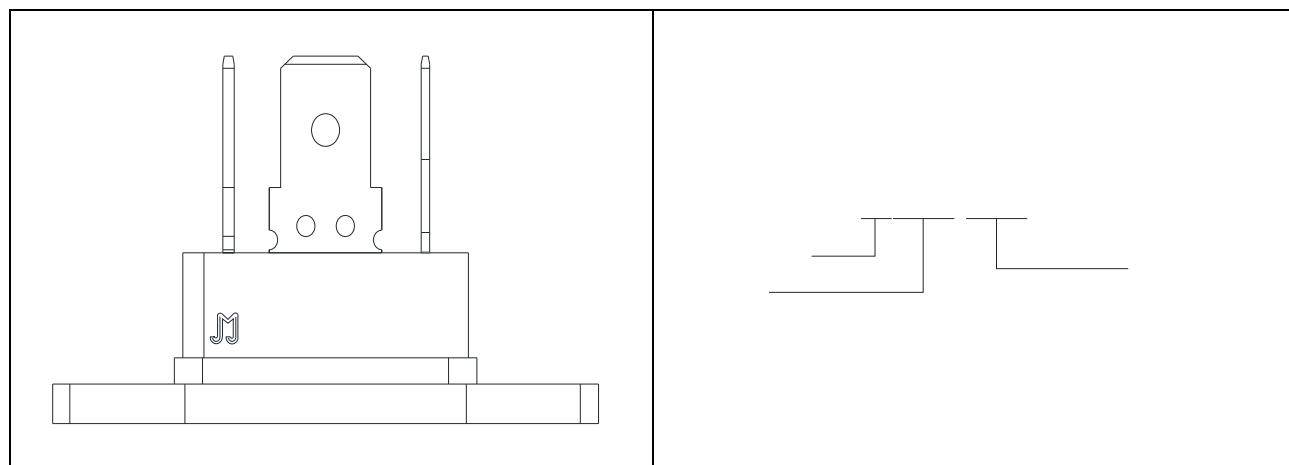
ORDERING INFORMATION**MARKING**



FIG.1

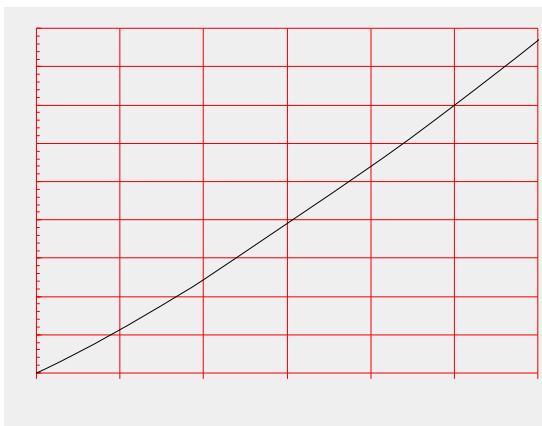


FIG.2:

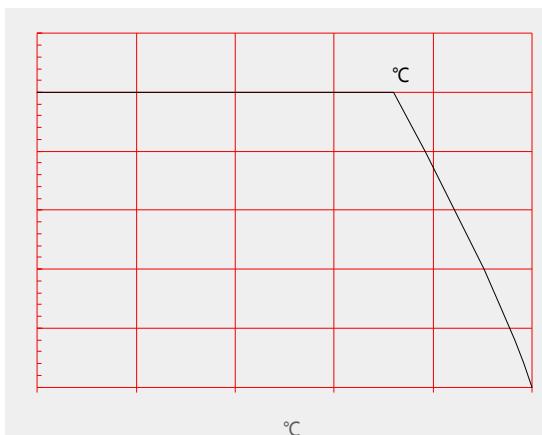


FIG.3:

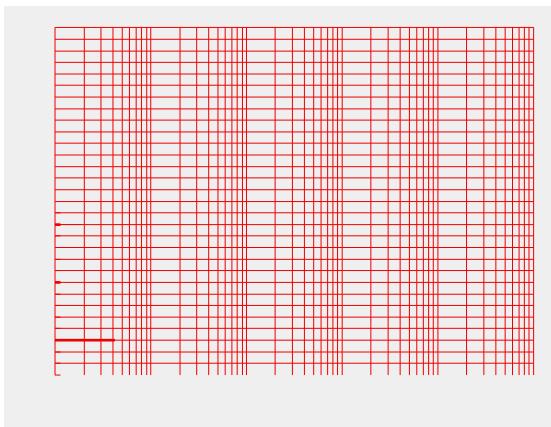
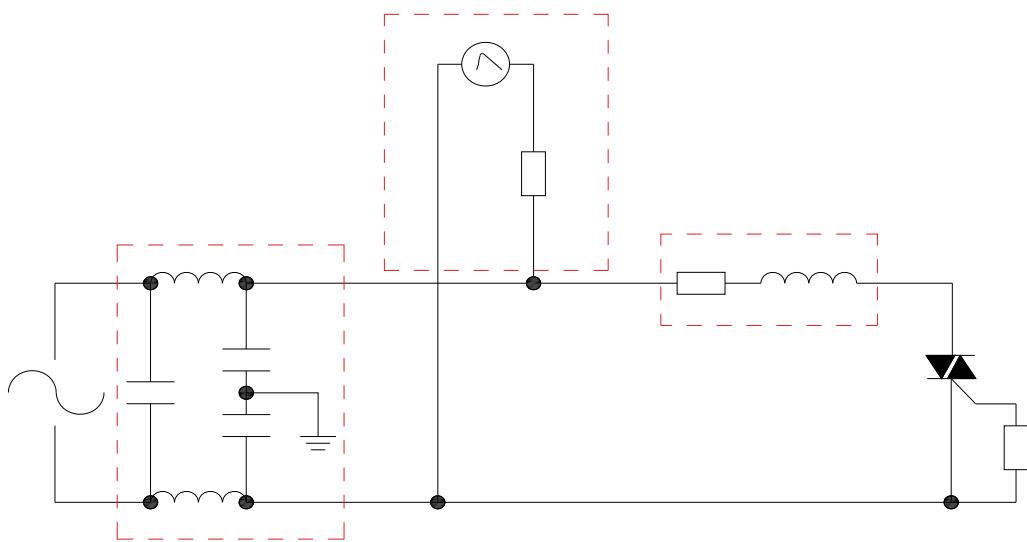


FIG.4:



SHAPING AND SOLDERING PARAMETERS

**ORDERING INFORMATION**

| Order code | Voltage $V_{DRM}/V_{RRM}(V)$ | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|---------------------|---------------------------------|-----------|------------------|--------------------|---------------|
| | | - - | | | |
| JST25T-800BW | 800 | 50 | TG-C(Ins) | 10 | Tube |

Document Revision History

| | | |
|--|--|--|
| | | |
| | | |



PACKAGE MECHANICAL DATA



