



JST30C-1200BW 30A TRIAC

Rev.A.1.0

DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
			°C
			°C
			°C
			°C
\leq			°C
			°C
			°C
			°C
\times			°C
			°C
			°C

°C			
----	--	--	--

ELECTRICAL CHARACTERISTICS °C

Symbol	Test Condition	Quadrant	Value	Unit
		I II III		
		I II III		
	°C	I II III		
		I III		
		II		
		°C		
		°C		
	°C			


STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX.)	Unit
		°C	
		°C	
		°C	
		°C	
		°C	

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
			°C
			°C

ORDERING INFORMATION

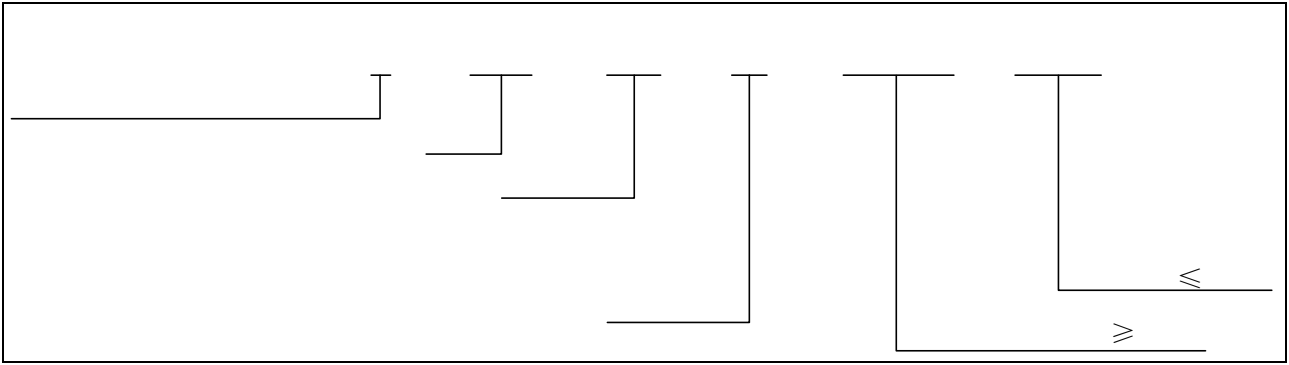

MARKING

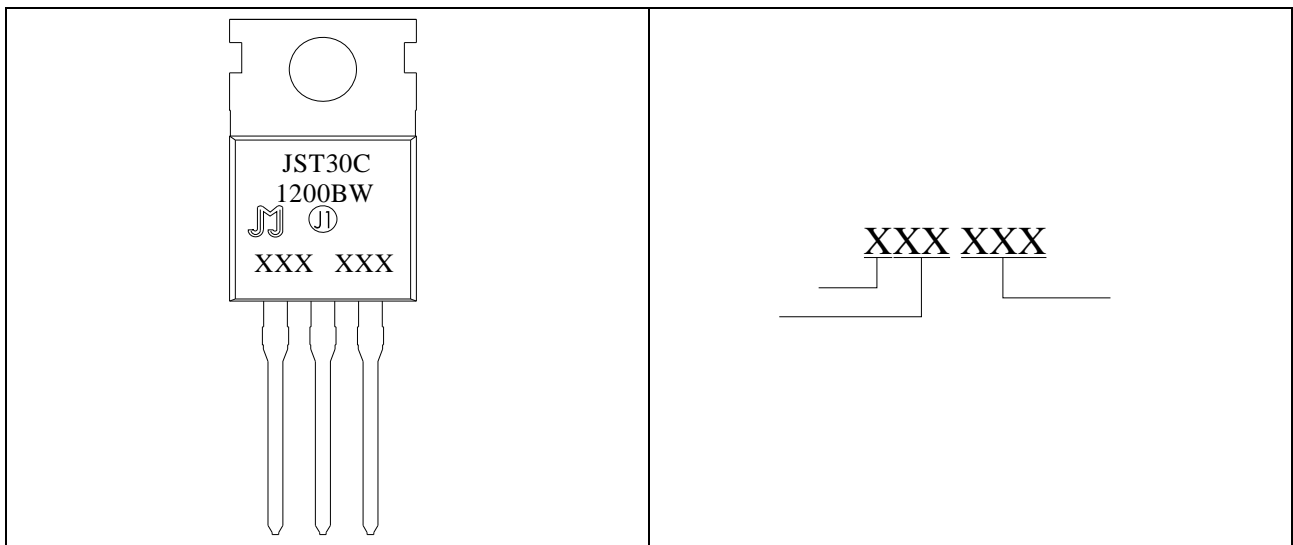


FIG.1



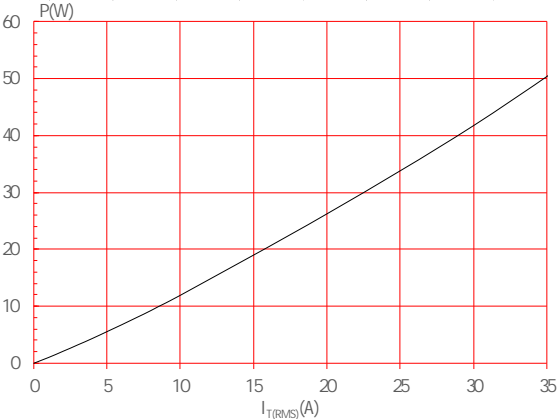


FIG.2:

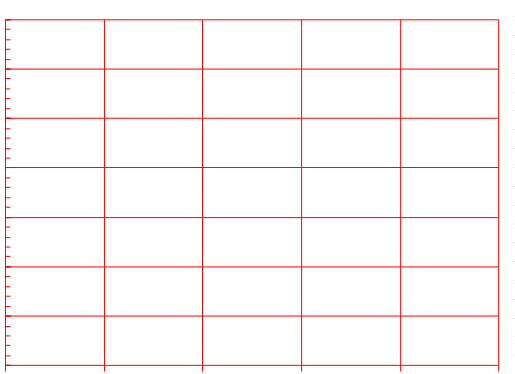

:

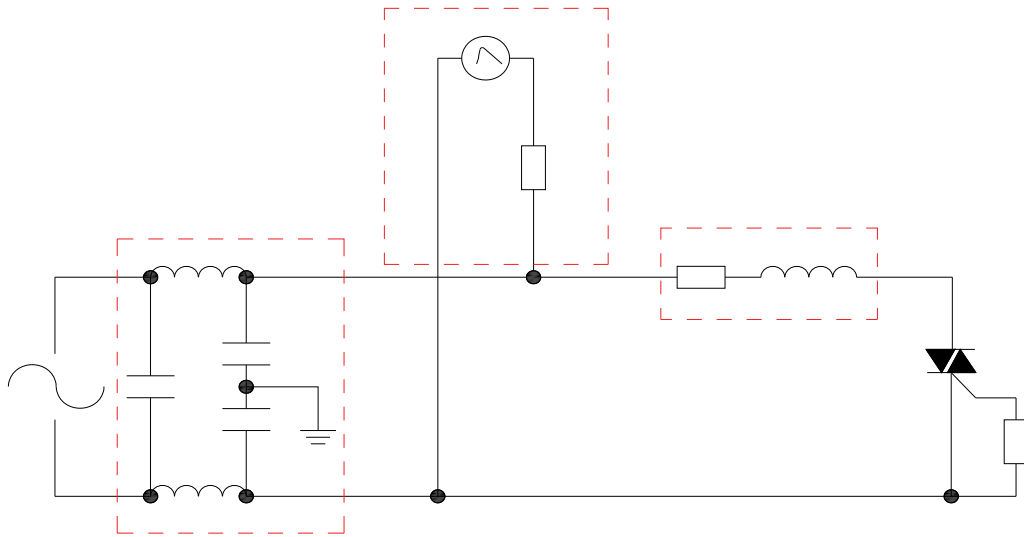

SHAPING AND SOLDERING PARAMETERS

《

》

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST30C-1200BW	1200	50	TO-220C	50	Tube

Document Revision History

Document Revision History		

PACKAGE MECHANICAL DATA

